

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
23 September 2004 (23.09.2004)

PCT

(10) International Publication Number
WO 2004/080550 A2

- (51) International Patent Classification⁷: **A63F**
- (21) International Application Number:
PCT/US2004/006045
- (22) International Filing Date: 27 February 2004 (27.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/453,627 10 March 2003 (10.03.2003) US
- (71) Applicant (for all designated States except US): **CYBER-SCAN TECHNOLOGY, INC.** [US/US]; 550 Hamilton Avenue, Palo Alto, CA 94301 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **GATTO, Jean-Marie** [FR/GB]; 46 Parkside, 29-46 Knightsbridge, London, SW1X7JP (GB). **BRUNET DE COURSSOU, Thierry** [FR/US]; 126 Waverly Street, Palo Alto, CA 94301 (US).
- (74) Agent: **YOUNG, Alan, W.**; Young Law Firm, P.C., 4370 Alpine Road, Suite 106, Portola Valley, CA 94028 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DYNAMIC CONFIGURATION OF A GAMING SYSTEM

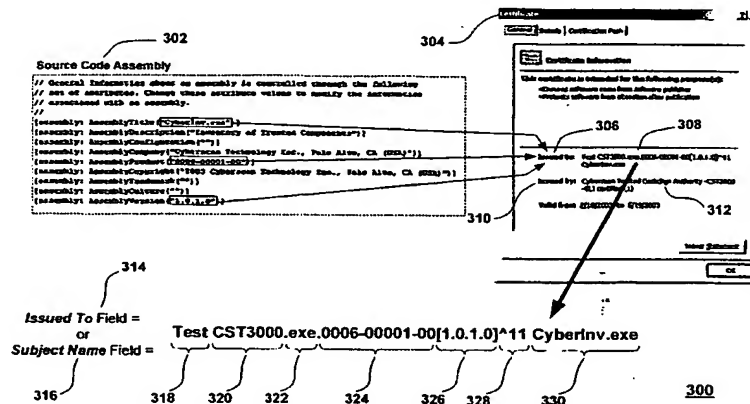

(57) Abstract: A method to enable dynamic configuration of gaming terminals installed in one or a plurality of gaming premises whereby certified games, certified data files and certified support software components are activated in accordance with a predetermined schedule or automatically in response to the observed gaming activity. The method may include allocating an individual PKI certificate to each executable software component and each of its versions, binding the PKI certificate to the executable software, associating a distinctive policy for each certificate and then enforcing the software execution policies in accordance with the desired authorized game configuration and schedule. The PKI certificate's "Subject Name" (or "Issued to" field or "CommonName" field) may be a concatenation of the software component identification, its version number and optionally other identification characters. The method applies equally to other network connected gaming subsystems. The method enables a fine-grained and secure control of the authorized software components and thus the flexibility to securely configure the gaming system in accordance with a schedule or in a close-loop fashion in order to meet business objectives. In addition, a method to enable the certification authority to bind the certificates to the tested code is described.

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

DYNAMIC CONFIGURATION OF A GAMING SYSTEM

CROSS-REFERENCE TO RELATED CASES

The present application claims priority of copending and commonly assigned US provisional application serial number 60/453,627 filed on March 10, 2003.

5

BACKGROUND OF THE INVENTION

Field of the Invention

The present inventions relate generally to the field of network connected pay computer-controlled games, either games of skills or games of chance, and more particularly to the field of automated monitoring and control of a large number of clusters of pay gaming terminals. The gaming terminals may be slot machines, video lotteries, bingo systems or lottery terminals in all their forms; that is, desktop terminals, wall or pedestal mounted kiosks, or full size consoles, operating either in a local area network (LAN) or in a wide area network (WAN). The present inventions also relate to the monitoring, control and payment systems linked to the gaming terminals.

15 Description of the Prior Art and Related Information

Pay entertainment and gaming systems of the prior art, either of the cash-in or the cash-less type, are seriously limited due to the technical choices made in order to comply with gaming regulatory requirements. Regulators are mainly concerned with funds that may be illegally acquired by individuals as well as with funds that may not be acquired by legitimate winners as a result of flaws, cheating and/or stealing. Game regulators are reluctant to accept state-of-the-art operating systems, multimedia and Internet technologies because of security concerns and tend to favor antiquated technology based upon secrecy rather than "open" state-of-the-art technology. A "Request/Authorize"

method for downloadable games has been proposed by another company (IGT's Secure Virtual Network in a Gaming Environment - Publication US2002/0116615 A1) but the method disclosed therein does not cover how to ensure that only certified authorized components may execute.

- 5 Although downloadable games are undeniably going to flourish, they have yet to create confidence within the regulatory arena.

SUMMARY OF THE INVENTION

- Embodiments of the present invention overcome the security limitations of the prior art and allow game operators the flexibility to dynamically configure their estate of gaming terminals. It is to be noted that although the gaming industry has coined the term "downloadable game" and that gaming standard GLI-21 entitled "Game Download System" has been published by Game Laboratory International (GLI), the term downloadable game is rather restrictive, as the downloading of software components to computer terminals and computer servers is by itself pervasive in any network distributed computer system. However, downloading certified game components in a secure manner is a problem that has yet to find a satisfactory solution.
- 10
- 15

- Embodiments of the present invention may allocate an individual PKI certificate to each executable software component and each of its versions, binding the PKI certificate to the executable software and associating a distinctive policy for each PKI certificate. The PKI certificate's "Subject Name" (or "Issued to" field, or "CommonName" field) may be a concatenation of the software component identification, its version number and optionally other identification characters, for example.
- 20

According to other embodiments, the present invention offers a method to enable dynamic configuration of gaming terminals installed in one or a plurality of gaming premises whereby certified games, certified data files and certified support software components may be activated in accordance with a predetermined schedule or
5 automatically in response to the observed gaming activity. This may be accomplished by configuring and then enforcing the software execution policies for selected PKI certificates in accordance with the desired authorized game configuration and schedule.

Further embodiments of the present invention offer a method to ensure the trust of non-executable files such as initialization or configuration files, video files, sound
10 files, multimedia files, file containing list of hashes, CRCs, and/or signatures. This method relies on the certificate Software Restriction Policy as described herein.

Still further embodiments of the invention enable the certification authority to bind the certificates to the tested software components.

The present invention, according to still further embodiments thereof enables a
15 dynamic generation of the list of games made available to the players without transferring a configuration file or files from the central server to the gaming machines. For example, a method according to an embodiment of the present invention relies on attempting to execute a game component on which a certificate Software Restriction Policy is enforced.

20 Embodiments of the present invention leverage the technology described in commonly assigned US patent application filing 60/393,892 entitled –“Secure Game Download” in which code signing and Software Restriction Policy enable executing authorized game software. Code signing and Software Restriction Policy (SRP) technologies are available in Microsoft Windows XP, Windows 2000 and Windows

2003, Embedded Windows XP as well as in future Windows versions (as of this writing, the next version is code-named "Longhorn") to ensure that only executable software components from a trusted publisher, let's say "Microsoft", are allowed to run. Code signing and Software Restriction Policy technology are applied to executable components such as *.exe, *.dll, *.ocx, *.vbs, *.msi, *.cab, etc. In addition, Software Installation Policy (SIP) ensures that software components are installed in a controlled fashion. Embodiments of the present invention extend the use of code signing, Software Restriction Policy and Software Installation Policy to individual software components that are allowed to execute in a network connected gaming system by associating a distinctive code-signing certificate to each executable software component. Each executable software component version (usually comprising major version, minor version, revision and build) may have a unique certificate. A distinctive certificate may be created for each software component version and the two entities (the compiled code and the certificate) may be bound together by a code signing operation, herein called "signcode.exe".

Code signed software components may be packaged together with non-signed software components (if any) into a MSI Microsoft installation package (MSI = Microsoft Software Installation). An MSI package is an executable component that in turn receives a distinctive certificate bound to its content by a code signing operation. Only the software component version that has successfully passed the regulatory certification process may be allowed to run by enforcing an unrestricted policy to the associated certificate.

Moreover, embodiments of the present invention extend the use of code signing and Software Restriction Policy to ensure that only authorized non-executable

components are used by the authorized executable components. This is of particular value for configuration files or media files that may affect the game outcome such as fixing the return to player at, for example, 95% between 5:00 PM and 11:00 PM, or at 98% during other time periods. For this, non-executable components may be placed in

5 code signed MSI (Microsoft Software Installation) installation packages. Each individual MSI package is an executable component whose execution can be controlled by Software Restriction Policy (SRP). A distinctive certificate may be created for each package version (a part number is created for a preselected aggregate of non-executable components) and the two entities may be bound together by the code signing operation

10 "signcode.exe". Within the network connected gaming system, trust for non-executable components may be established by executing the associated authorized code signed packages using SRP upon computer startup or alternatively on demand, resulting in the re-installation of the original non-corrupted non-executable components. The non-executable components may be: initialization or configuration files, video files, sound

15 files, multimedia files, file containing list of hashes, CRCs, and/or signatures, for example.

For example, DRM (Digital Rights Management) technology offered by Microsoft Windows Media Player may be used to ensure that only authorized multimedia files may be played or viewed.

20 Also, RM (Rights Management) technology offered with Microsoft Office 2003, with the associated RM services and SDK (Software Development Kit) may be used to ensure that only authorized data files may be accessed, viewed, copied or modified.

Software Installation Policy (SIP) and Software Restriction Policy (SRP) configured with an individual PKI certificate associated to each authorized software

component offer a "Policy/Enforce" model, or in other words a "Configure the Policy and then Enforce the Policy" model to enable network installation (or "game download") and activation at predetermined times (or "game scheduling") of selected authorized software components, in order to control the software of the network connected gaming system and offer selected games to players. This "Policy/Enforce" method may be constructed on a demonstrable trusted base; it offers transparent security and fine-grained auditing, contrasting with conventional "Request/Authorize" methods that do not demonstrate reliance on a trusted base to enforce the use of only trusted software components.

10 A network-connected gaming system comprises hundreds of authorized certified software components that may be selectively downloaded and scheduled. Considering on-going support for 50 customers and for 200 distinctive games over a period of 5 years, tens of thousands of software components will each need to receive individual certificates and be certified. Accordingly, embodiments of the present invention include an automated certification platform. Herein, such a certification platform is denoted "Integrated Certification Environment" or ICE. Embodiments of such a certification platform according to the present invention are designed to automate the stepping through the procedure that must be done by the regulatory certification authority to produce only authorized software components that may be dynamically installed in a gaming system, and to prevent generation of erroneous software components. In addition, the ICE offers support to selectively enable the download of approved system software components using Microsoft Software Update Services (SUS), for example.

Embodiments of the present methods rely on established security standards and a demonstrable trusted base (as opposed to relying on security by secrecy) in order to offer

transparent security and allow fine-grained auditing. Embodiments of the present inventions are also applicable to any of the subsystems available in a network connected gaming system that require preventing non-authorized software components from executing or affecting the game outcome, such as the gaming terminals, the game management system (CMS or MCS) that monitor and control whole or part of the estate of gaming machines, the progressive jackpot systems, the bonussing systems as well as game payment verification systems such as IGT's EasyPay and Cyberview's PVU (Payment Verification Unit) and PVS (Payment Verification System). Gaming subsystems may be tested against gaming standards such as those produced by GLI; the game standards are mandated by game regulators in accordance with local regulation and laws. The network-connected subsystems may be located within the premises accommodating the estate of gaming machine (connection via a LAN) or outside of the premises (connection via a WAN).

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates the intrinsic information that uniquely identifies each executable software component, according to an embodiment of the present invention.

Fig. 2 illustrates the information uniquely identifying each executable software component being made available into the Windows Event Log upon execution of the software component, according to an embodiment of the present invention.

Fig. 3 illustrates the information (test certificate indicator, project/product code, type of executable code, part number, major/minor/build/version, certification lab identifier, friendly name) uniquely identifying each executable software component being used to generate the "Subject Name" (or "Issued to" field, or "CommonName"

field) of the individual PKI certificate associated to each executable software component, according to an embodiment of the present invention.

Fig. 4 illustrates the information that may be entered in the Extended Attributes of a PKI certificate, according to an embodiment of the present invention.

5 Fig. 5 illustrates the information that may be obtained using the Trusted Inventory tool, according to an embodiment of the present invention.

Fig. 6 illustrates the information that may be entered to configure a type-certificate Software Restriction Policy rule, according to an embodiment of the present invention. A Software Restriction Policy (SRP) is configured using the Group Policy
10 Object Editor.

Fig. 7 illustrates the policies that are associated to the active directory container used to configure the gaming machines, according to an embodiment of the present invention.

Fig. 8 illustrates an exemplary cycle from the moment a game is being created
15 until it is first executed on a gaming terminal, according to an embodiment of the present invention.

Fig. 9 illustrates the global verification process performed by the terminal in order to check that no unauthorized file may execute or may affect game outcome, according to an embodiment of the present invention.

20 Fig. 10 illustrates the configuration of the three parties involved in a new game cycle detailed at Fig. 8, according to an embodiment of the present invention.

Fig. 11 illustrates the 12 folders created on the disk repository of the development environment, according to an embodiment of the present invention.

Fig. 12 illustrates the dataflow for step 1 to step 3 for producing the certified authorized software components, according to an embodiment of the present invention.

Fig. 13 illustrates the dataflow for step 4 to step 12 for producing the certified authorized software components, according to an embodiment of the present invention.

5 Fig. 14 illustrates the grouping of gaming terminals and the associated enforced policies, according to an embodiment of the present invention.

Fig. 15 illustrates a method for enforcing a Software Installation Policy by "linking" the policy, according to an embodiment of the present invention.

10 Fig. 16 illustrates a method for enforcing a Software Restriction Policy by "linking" the policy, according to an embodiment of the present invention.

Fig. 17 illustrates the method to enforce a policy at a predetermined time, according to an embodiment of the present invention.

Fig. 18 illustrates the method to enforce a selected policy as the result of observing the gaming activity, according to an embodiment of the present invention.

15 Fig. 19 illustrates the method to generate dynamically the menu list of authorized game made available to the player on each gaming terminal, according to an embodiment of the present invention.

Fig. 20 illustrates the method to generate a code signed companion software component, according to an embodiment of the present invention.

20 Fig. 21 illustrates the method to quickly generate dynamically the list of game installed on each gaming terminal using the companion software component, according to an embodiment of the present invention.

DETAILED DESCRIPTION

Reference will now be made in detail to the construction and operation of preferred implementations of the present invention illustrated in the accompanying drawings. The following description of the preferred implementations of the present invention is only exemplary of the invention. The present invention is not limited to these implementations, but may be realized by other implementations.

Fig. 1 illustrates Software Component Identification and Traceability via File Properties, according to an embodiment of the present invention. Shown at 100 in Fig. 1 is the intrinsic information that uniquely identifies each executable software component.

10 The executable component source code comprises executable code lines (e.g. $X = X + 1$; not shown here) and associated source code assembly information 102, 104 that comprises comment lines 106 and assembly information. Herein, AssemblyTitle 108, AssemblyProduct 110 and AssemblyVersion 112 are configured. The AssemblyTitle 108 is set to CyberInv.exe that is the friendly name of the executable software component;

15 AssemblyProduct 110 is set to 0006-00001-00 that is the part number of the executable software component and AssemblyVersion 112 is set to 1.0.1.0, which is the version number of the executable software component. Once the source code is compiled and the executable is built (CyberInv.exe in this case), the configured assembly information is available via the File Property of Windows 114 when right clicking on the file

20 CyberInv.exe and selecting "Properties" and "Version", as shown at 116. The friendly name is shown in the Description field 118, the part number is shown in the Product Name field 120, 122 and the version is shown in the File Version field 124.

-11-

It will be apparent to those of skill in the art of software development that intrinsic information that uniquely identifies each executable software component may be obtained in various combinations of assembly directives and file property fields. Additional information may be configured such as, for example, the software component part number, major version number, minor version number, build number, revision number, project name, type of software component, language variant, game regulation variant, friendly name, identification of the certification laboratory, identification of the client, and other predetermined identification identifiers. The identifiers associated with the executable software component using source code assembly directives may, therefore, be traceable via the File Property features of the Windows operating system.

An example of such a configuration is CST3000-0006-00001-00[1.0.1.0]{21}^11~9%S CyberInv.exe that comprises a concatenation of identifiers that may be used in a file name or a PKI certificate subject name. According to this example, CST3000 is the marketing system product identification or the project name; 0006-00001-00 is the software component part number; [1.0.1.0] details the software component major version number, minor version number, build number, revision number; {21} is the software component variant identifier; ^11 identifies the certification lab that certifies the software component; ~9 identifies the customer for which this software component is certified; %S is the software component language variant ("S" for Spanish in this example); CyberInv.exe is the software component friendly name for quick identification. Spaces may be used freely and the identifier fields may be written in any order so as to facilitate reading. Identifier fields may be omitted whenever the context already provides such information. The framing or delimiter characters such as

-12-

[], { }, ~, ^, % which are allowable characters to be used in file names and certificate subject names facilitate human recognition as well as string searches for particular attributes (global search for all Spanish variants for example).

In the same manner, a selected set of identification information making up the certificate subject name may be used for making up the file name of PKI certificate related files such as *.CER, *.P7B and *.PVK such as to facilitate human identification, string searches and file searches.

Fig. 2 illustrates traceability via the Windows Event Log. Reference numeral 200 in Fig. 2 illustrates the information uniquely identifying each executable software component being made available to the Windows Event Log upon execution of the software component. The Windows Event Log 202 is a repository for logging important events; it is viewed via the Event Viewer 204. Windows default event log bins (or containers) are Application, Security and System. In the illustrated example, an Event Log bin 206 denominated "Cyberscan" has been added. The Cyberscan bin 206 contains traceability information in its "Source" field that is being logged by each of the executable software components. The software executable software component makes use of the Event Log API to "splash" its identification information into the source field of a predetermined bin in the Windows Event Log each time it starts execution, or at any other time should the occurrence of an event be traced, in order to provide an audit trail to be examined by auditors. The part number 214, version 216 and friendly name 212 identifiers associated to the executable software component using source code assembly directives 201 are therefore traceable via the Event Log features of the Windows operating system. Other information associated with the executable software component

may be splashed into the event log for additional traceability. The "Type" field 208 may flag an important audit condition such as here "Failure Audit" to alert the auditor.

Fig. 3 illustrates the Certificate "Issued to" Field. Reference numeral 300 illustrates the information 308 (test certificate indicator 318, project/product code 320, type of executable code 322, part number 324, major/minor/build/version 326, certification lab identifier 328, friendly name 330) uniquely identifying each executable software component being used to generate the "Subject Name" 316 (or "Issued to" field 306, 314, or also known as the "CommonName" field) of the individual PKI certificate 304 associated with each executable software component, according to an embodiment of the present invention. The friendly name, part number and version of the executable software components may be substantially identical to those entered in the source code assembly 302. "Subject Name" 316 and "Issued to" field 306, 314 refer to the same information; Subject Name is preferably used hereafter. The certificate authority 312 responsible for generating the PKI certificate is shown in the "Issued by" field 310.

Fig. 4 at 400 illustrates the information that may be entered in the Extended Attributes 408 of a PKI certificate 402, according to an embodiment of the present invention. This information may be viewed by selecting, for example, the "Details" tab 404 of the certificate 402 and selecting "Extensions Only", as shown at 406.. Intrinsic information that uniquely identifies each executable software component may be entered in the extended attributes of a PKI certificate in order to attain the same purpose as described for Fig. 3 as an alternative to entering the information in the certificate Subject Name. In the same manner, additional identification information to those entered in the Subject Name may be entered in the extended attributes.

Fig. 5 illustrates traceability via the Trusted Inventory Tool 504, according to an embodiment of the present invention. Reference numeral 500 in Fig. 5 illustrates the information that may be obtained using the Trusted Inventory tool 504. The trusted inventory tool 504 is a simple application that searches for executable files through the branches of a given tree directory and determines whether the executable software component may be trusted by, for example, calling the Microsoft ChkTrust.exe tool. If the executable software component is signed by a valid PKI certificate and its executable binary data is uncorrupted (its recalculated hash matches the code signature), the ChkTrust.exe tool returns the authenticode "Trusted" attribute; an "Untrusted" attribute is returned otherwise. The Trusted attributes are automatically tabulated in a spreadsheet such as, for example, Microsoft Excel as depicted at 506. Each line 508 in the table provides details on the executable software component that is being examined, such as program path location 510, friendly name 512, executable type 514, authenticode trusted attribute 516, part number 518 and version 520. According to an embodiment of the present invention, therefore, the part number 518, version 520 and friendly name 512 514 identifiers associated with the executable software component using source code assembly directives 502 are traceable via the Trusted Inventory tool.

Reference numeral 600 in Fig. 6 illustrates the information that may be entered to configure a type-certificate Software Restriction Policy rule. A Software Restriction Policy (SRP) 604 may be configured using the Group Policy Object Editor 606. The type-certificate Software Restriction Policy rule 610 may be entered in the "Additional Rules" node 608 of the Software Restriction Policy object 614. In Fig. 6, the part

-15-

number, version and friendly name configured in the source code assembly 602 are recognizable in the certificate subject name 612.

Fig. 7 illustrates SRP Certificate Rules Policies via the Group Policy Management Console, according to an embodiment of the present invention. Reference numeral 700 in Fig. 7 illustrates the policies that are associated to the active directory container used to configure the gaming machines referenced at 706. Policies are managed using the Group Policy Management Console 702, 704. In this illustration, a policy named "SRP_CyberInv" 708, 710, 712 is selected, for the purpose of viewing a detailed report of the rules that are configured. The report shows details in a hierarchical order. This exemplary policy defines only one certificate rule 716 in the Software Restriction Policy node 714. The certificate subject name 718 is set with a security level 720 of "Unrestricted", as shown at 722, thus ensuring that only the executable software component identified in the certificate subject name is authorized to execute when the policy 714 is enforced. The SRP path rules 724 must be configured such as to prevent non-authorized software from executing. The policy 708 is enforced when it is linked to its container object 706 herein named "Gaming Machines".

Reference numeral 800 in Fig. 8 illustrates an exemplary cycle from the moment a game is being created until it is first executed on a gaming terminal, according to an embodiment of the present invention. The flowchart 800 starts at 802 when the decision to initiate a project to develop and release a new game is made. The game developer (Cyberscan here, for illustrative purposes only) 804 develops a new game application 806 whose code must be certified at 810 by a recognized certification lab 808. The certified code must then be signed as shown at 812 using PKI certificates produced by a

-16-

certificate issuing authority (CA) 814 controlled by a trusted party 816. The trusted party 816 may be the certification lab 808. The signed executable software components may be packaged in code-signed MSI installation packages signed in a manner substantially identical to the executable software components, that is, with a unique PKI
5 certificate whose subject name contains part number, version and friendly name identifiers for the MSI package. The MSI packages together with scripts may then be copied to a removable media, such as a CD-ROM 818 for example.

The game operator 820 receives the CD-ROM and when it decides to deploy the new game 822, it copies the packages and associated scripts from the removable media
10 into a library repository on a server 824 (the DEPLOY server in this case). The scripts contain automation tasks such as copying to the repository and configuring the policies.

In the case of gaming terminals connected in a LAN, each gaming terminal 826 is controlled by the policies as soon as they are enforced. The Software Installation Policies (SIPs) controlling the installation of the new game automatically execute the MSI
15 installation packages upon policy enforcement, provided the corresponding Software Restriction Policies have been configured to authorize the execution of the MSI installation packages. This process is performed at 828, 830. If no SRP authorizes the execution of the MSI installation packages, the installation is ignored, as shown at 832. When the MSI installation package is authorized to execute, the software components
20 and other files contained in the package may be copied to the gaming terminals, as suggested at reference numeral 834 836. Other configuration tasks may also be carried out during the Microsoft installer installation process such as, for example, setting the Windows registry, setting shortcuts and installing software patches.

Download of the game software components from the game repository to the gaming terminals may occur as soon as the associated Software Installation Policies are enforced (and the SRPs for the MSI installation package is permitted accordingly). Therefore, scheduling of the download may be achieved by simply enforcing the associated software installation policies at a given time; this may be accomplished by having an operator manually enforcing the SIP at a predetermined time via the group policy management console, or having a process automatically enforcing the SIP at a predetermined time via the API to the group policy management console. Enforcing a policy may be achieved by linking the selected policy to the selected policy object in the domain controller active directory.

Game activation 840 that authorizes execution of the game may be achieved by enforcing the associated Software Restriction Policies. In the same manner, scheduled game activation and deactivation in order to offer selected authorized games to the players at predetermined authorized times may be achieved by simply enforcing the associated Software Restriction Policies at a given time; this may be accomplished by having an operator manually enforce the SRP at a predetermined time via the group policy management console, or having a process automatically enforce the SRP at a predetermined time via the API to the group policy management console. Enforcing a policy may be achieved by linking the selected policy to the selected policy object in the domain controller active directory. Alternatively, a selected executable software component may be prevented from executing by configuring its associated SRP security level to "disallowed".

At this stage, a global verification process 842, 844 as described relative to Fig. 9 may advantageously be executed to verify the trust of every software component installed on the gaming terminal. Should the global verification fail, the gaming terminal may be locked at 846 pending servicing by an attendant.

5 When a player selects a game from a gaming terminal 838 from a selection menu and requests execution thereof, as shown at 848, the authenticodes of the game's executable software components are verified by the associated enforced Software Restriction Policy as shown at 850 before beginning execution 858. Should the authenticode verification fail at 852, the gaming terminal may be locked at 854 pending
10 servicing by an attendant. If the code is trusted, as verified by the associated enforced SRP, the game is allowed to execute, as shown at 858.

Policy changes are automatically distributed by the Windows server operating system throughout the network connected gaming system at periodic intervals; this automatic process may be disabled if required. Alternatively, the RegisterGPNotification
15 function may be used by the game application software executing on each gaming terminal to check if an applicable group policy has changed. The gaming terminal may then decide on enforcing the policies locally immediately. The gpupdate.exe service, the RefreshPolicy function or the RefreshPolicyEx function may be used by the game application software executing on each gaming terminal to enforce the configured
20 policies. A reboot may optionally be performed in order to recheck the gaming terminal trusted base and ensure the policies have been completely enforced (long game installation for example).

The RegisterGPNotification function enables an application to receive notification when there is a change in policy. When a policy change occurs, the specified event object is set to the signaled state. Further information on the RegisterGPNotification function may be found at:

- 5 <http://msdn.microsoft.com/library/default.asp?url=/library/en-us/policy/policy/registergpnotification.asp>. The RefreshPolicy function causes policy to be applied immediately on the client computer. Further information on the RefreshPolicy function may be found at:

- 10 <http://msdn.microsoft.com/library/default.asp?url=/library/en-us/policy/policy/refreshpolicy.asp>. The RefreshPolicyEx function causes policy to be applied immediately on the computer. The extended function allows specifying the type of policy refresh to apply to be specified. Further information on the RefreshPolicyEx may be found at <http://msdn.microsoft.com/library/default.asp?url=/library/en-us/policy/policy/refreshpolicyex.asp>.

- 15 The menu of authorized games offered to the player may be dynamically generated by each terminal without requiring the central system to dispatch the list of authorized games or having each terminal fetch the list of authorized games from the central system; this may be done by having each terminal check the policies enforced on the games. This may be accomplished by having a process in each terminal attempt to
- 20 execute each of the entry point for each game (the parent module which is first called upon selecting a game to play) . If the execution succeeds, then the game is authorized and may be added to the games menu offered to the player. If the execution is denied (SRP is unlinked or the security level is disallowed), then the game is not authorized and

-20-

it is removed from the games menu offered to the player. Similarly, if a game entry software component file is not found, then the software is not installed or has been removed and is removed from the games menu offered to the player. The process of dynamically generating the game selection menu may be optimized in many ways in order to reduce the game time to start overhead to check if it is authorized.

In a casino, although new games may be scheduled to be downloaded to gaming terminals and activated at predetermined times, it is a requirement that games may not be changed while a player is playing. In practical terms, a player is considered to have terminated his or her game play when the player's credit balance remains at zero for a predetermined period of time. The predetermined period time is sufficient for allowing the player to enter a new bill or other form of credit instrument to continue playing. Therefore, the game application software on each game terminal may, according to embodiments of the present invention, continually test for this condition (credit = 0 for a predetermined time) before checking for change in policy, enforcing the policy changes and then updating the menu of games to be made available to the next player.

Fig. 9 at 900 illustrates the global verification process performed by a terminal to check that no unauthorized files are allowed to execute or affect the game outcome. This process may be performed by any of the subsystems connected in the gaming systems.

The process may start with a computer cold or hot reboot 902 such that the operating system trusted base may be thoroughly verified before the game software components are verified. The trusted base is detailed in commonly assigned and copending US application serial number PCT/US2002/029927, entitled "Secure Game Download", attorney docket – CYBS5819, the specification of which is incorporated

herein by reference, and also in Microsoft Next Generation Secure Computing Base (NGSCB), also incorporated herein by reference. Details of Microsoft's NGSCB are located at www.microsoft.com/ngscb. During the trusted base verification, the integrity of the Driver Signing framework, the Windows File Protection framework and Software
5 Restriction Policies framework are verified. With NGSCB operating system such as forthcoming "Longhorn", a framework called Nexus deeply integrated directly within the hardware components (in each major chipsets) and the BIOS which constitutes a mechanism for authenticating the trustworthiness of the software and hardware configuration, is booted prior to checking the integrity of the Driver Signing framework,
10 the Windows File Protection framework and Software Restriction Policies framework.

On completion of the operating system boot-up 902 or at another time, the global verification process 904 may be executed. The CyberInv process 910, 914 is also shown and described at Fig. 5. The CyberInv process 910, 914 verifies all the executable files in given folder trees such as 912 (*.exe, *.dll, *.ocx, *.vbs, *.bat, *.msi, *.cab, for example)
15 for trustworthiness. If any file is found to be untrusted as shown at 932, then the gaming terminal may be frozen as shown at 934 pending examination by security personnel. A spreadsheet file 916 may be produced that list the verification status of each executable file. If the authenticode of all the files is trusted as shown at 918 then the CyberInv process 908, 910, 914, 924 returns at 920 a trusted status, as shown at 926 930.
20 Consequently, all of the executable software components may be considered to be trusted, as shown at 930.

However, it is to be noted that the fact that an executable software component is trusted does not imply that the software component is authorized to execute; it merely

-22-

indicates that the software executable software component has a valid authorized authenticode certificate and that the software component binary data is not corrupted. Checking whether an executable software component having a valid authorized authenticode certificate is authorized to execute requires that the applicable Software Restriction Policy be checked. This may be performed automatically when the software component is loaded by the operating system to start its execution, either when dynamically building the menu of authorized games, or each time upon starting execution of the game when the player has selected a game to play – or using an appropriate service that may be called by an application.

Although RM (Rights Management) and DRM (Digital Rights Management) technology from Microsoft is readily available for authenticating the trustworthiness of non-executable files such as media files, Word files and emails, for example, it adds management complexity on top of the Software Restriction Policy framework when used in a network-connected gaming system. Addressing this, embodiments of the present invention offer a method for a network connected gaming system to trust non-executable files such as initialization or configuration files, video files, sound files, multimedia files, file containing list of hashes, CRCs, and/or signatures. The present method relies on packaging the non-executable files in a MSI installation package, the MSI package being subsequently code-signed with a unique certificate and the appropriate Software Restriction Policy is configured to enable installation (execution in fact) of this MSI package. Executable files and non-executable files may be packaged together for convenience. The selected aggregate of executable files and non-executable receives at least a part number (and preferably a version number as well) that is used in the subject

-23-

name of the associated certificate. Consequently, according to embodiments of the present invention, when the MSI package is installed, the installed non-executable files are obtained from a trusted and authorized source.

As the CyberInv process 908 has authenticated the trustworthiness of all the
5 *.msi files 911, therefore whenever there is a need to ensure that the non-executable files are trusted, the associated MSI package is re-installed. It is to be noted that the service that performs the installation of the MSI packages (msiexec.exe in the current versions of Windows) may be executed with a variety of execution modifiers, such as shown at <http://www.microsoft.com/technet/treeview/default.asp?url=/technet/prodtechnol/winxppro/proddocs/msiexec.asp>. Of particular interest is the c option that reinstalls a file if it is
10 missing or if the stored checksum of the installed file does not match the new file's value (the log file will contain the anomalies detected for subsequent forensic analysis), as shown at 936. In the global verification process 904, the c option of the msiexec.exe command may be used for re-installing every package containing configuration files 938
15 (such as initialization or configuration files, files containing list of hashes, CRCs, and/or signatures), Flash files 940 (Macromedia Flash and Director), and other media assets files 942 in order to ensure the trustworthiness of these files.

Subsequent to completion of process 908, all the MSI packages for the executable software components may be re-installed with for example, the msiexec.exe command
20 using the p option in order to re-install missing authorized executable software components (the log file will contain the anomalies detected for subsequent forensic analysis).

Subsequent to the successful completion of the global verification process 904, the trustworthiness of the game application framework is established and may be started, as shown at 906.

It is to be noted that when a player wins an amount equal to or greater than
5 \$25,000 in a casino, there is a requirement to check the integrity of the gaming application. With legacy gaming terminals, the gaming terminal is powered-down and the ROMs are extracted in order to be verified in a trusted verifier named a "Kobetron". The Kobetron produces a signature for each of the ROMs that is compared with the corresponding signature produced by the certification lab. In this manner, the integrity of
10 the all the software components of the legacy gaming terminal, including the operating system, the game application and the configuration data may be verified. According to embodiments of the invention, when executing the global verification process 904 subsequent to the gaming terminal bootup at 902, a verification equivalent to a "Kobetron verification" may be performed. This metaphor helps greatly in the
15 acceptability of downloadable game technology by game regulators who are reluctant to accept state-of-the-art operating systems, multimedia and network technologies.

Fig. 10 at 1000 illustrates the configuration of the three parties involved in a new game cycle detailed at Fig. 8, according to an embodiment of the present invention. The three parties involved in a game cycle, according to embodiments of the present
20 invention, are the game developer 1002 whose facilities are located in a given city 1004, the certification laboratory 1006 whose facilities are located in a given city 1008 and the gaming operator 1010 located in a given city 1012. The game developer 1002 and the certification lab 1006 may have a network 1020 of connected gaming system(s)

-25-

representative of the network connected gaming system in place at the location (e.g., the casino) of the gaming operator 1010. In addition, the game developer 1010 and the certification lab 1006 each may have an integrated software development environment for compiling the game applications source code, each capable of managing at least 200
5 games for 50 distinct game operators as shown at 1044, (resulting in thousands of source code variants due to local regulation variances). The development environments may be kept synchronized via the secure network link 1016, 1018, 1014, 1022, 1020. A certification authority (CA) 1040 may be located at the game developer's site or may be controlled by an authorized trusted party such as VeriSign. The game developer site and
10 the certification lab site may be accessible from the outside by authorized mobile users 1034, 1028 via secure links 1022, 1018, 1030, 1036. Logon authentication may be carried out using, for example, smartcards as shown at 1038, 1032 or by other secure means.

The game developer 1002 supplies the certification lab 1006 with a CD-ROM (or
15 other media) containing the software components to be tested, as shown at 1048. The certification lab then certifies the software components supplied on the CD-ROM and provides the game developer 1002 with a CD-ROM containing the certified software components for deployment, as shown at 1046. The CD-ROM 1046 containing the authorized software components that were tested and certified by the certification lab
20 1006 may then be provided to the game operator (e.g., the casino) for installation and deployment on one or more of the gaming machines GM001, GM002, GM2995 coupled to the network 1024. The certified authorized software components are code-signed using a certificate produced in accordance with an embodiment of the present invention,

as described hereinabove. The network 1024 is preferably not coupled to any external network, as suggested at 1026.

Fig. 11 shows a 12-Step Integrated Certification Environment Process, according to an embodiment of the present invention. Shown at 1100 are the 12 folders 1110
5 created on the disk repository 1102 of the development environment. The 12 folders 1110 are mapped to the 12-step procedure 1104 to 1106 involved in producing the CD-ROM 1050 containing the certified authorized software components. Each folder contains the computer resources and instructions to carry out each step. The folders are clearly named with the step number and the title description of the procedure step at
10 1108.

Fig. 12 shows a dataflow diagram of Step #1 to Step #3 of the Integrated Certification Environment Processor for producing certified authorized software components, according to an embodiment of the present invention. Step 1 at 1220 may include obtaining a snapshot 1212 of the repository 1204 containing the game
15 developer's source code 1206, data files 1208 and media assets 1210 in order to configure the building environment of the reference platform with all the source code, data files, media asset files and resources files required to initiate the certification process. The snapshot files 1212 may be stored in a repository 1218 controlled by a version configuration and control system (SCCS) such as Microsoft Visual Source Safe
20 1214 (VSS) on the DEV development computer 1216. The files may be grouped in project directories as "*Projects*" such that the source files, control files and resource files are stored in convenient systematic fashion in the Visual Studio repository 1240 on the

development computer 1238. An inventory of the files submitted for certification may be produced. Step 1 may be qualified as "SETUP Projects" 1222.

Step 2 at 1232 may include compiling the source code and producing binary executable code. Microsoft Visual Studio 1224 is constructed so as to manage source
5 code as projects (a project can be a given game) regrouping all of the dependent source code, and data files. Step 2 is also referenced as *building the projects* or "BUILD Projects", as shown at 1234. Media assets may require a different compiling environment on the DEV computer 1230 such as the Macromedia Director 1228.

Step 3, shown at 1242 may include producing the projects MSI packages 1244
10 for the source code compiled in Step 2. Relevant non-executable file such as configuration files and media assets may be packaged in MSI packages with the compiled source code. It is to be noted 1246 that packages will be built again (step 8 hereafter) after code signing of EXE, DLL, OCX and other executables (step 6 hereafter). Step 3 may be referenced as "BUILD Packages Pass #1" 1244.

15 Fig. 13 shows, at 1300, the dataflow for step 4 to step 12 for producing the certified authorized software components, according to an embodiment of the present invention. Step 4 at 1308 calls for the *CyberInv.exe* process 1306, for a selected project (a Visual Studio project may typically regroup all the software components for an entire game), perform an inventory 1304 of the compiled software components produced by
20 Visual Studio 1302 on completion of the *Build Project* process 1234 (Fig. 12) as well as the MSI install packages produced by the *Build MSI Packages Pass #1* 1244 process (Fig. 12). The *CyberInv.exe* 1306 process may also include any other executable software components not directly managed under Visual Studio such as, for example,

ocx, *.vbs, *.bat, *.cab, *.js. (in fact, any executable component that is supported by the Software Restriction Policy technology).

The CyberInv.exe process 1306 produces the CyberInv.xls 1307 Excel spreadsheet file 916 shown at Fig. 9, which is examined by an authorized user in the MS
5 Excel program 1310. The CyberInv.xls 1307 file is copied to the folder "Step 4 – CyberInv" folder in 1110 in Fig. 11. The binary files having just been compiled are not code-signed; consequently the authenticode field shows an "Untrusted" status for each of the binary components. The friendly name, file type, part number and version (including build number) are extracted directly from the assembly information contained in the
10 source code, therefore truly reflecting the identity of the source code component.

Because the build number is incremented each time the code is recompiled in a Build operation, it is to be noted that the version number will change accordingly. The authorized user eliminates the rows that are irrelevant to the game to be certified and saves the file under the CyberCert.xls 1311 file name which contains the necessary
15 friendly name 512, executable type 514, part number 518 and version 520 information to compose the PKI certificate subject name in accordance with method detailed at Fig. 3 for subsequent code signing. The program path location 510 of the unsigned software components is also available for later retrieval of the unsigned binary file. The CyberCert.xls 1311 file is copied to the folder "Step 5 – CyberCert" folder in 1110 in
20 Fig. 11.

The CyberCert.xls 1311 file may be securely copied in encrypted form to a removable media such as a floppy disk, a CD-ROM or a USB disk 1312, or alternatively transferred to another location by secure communication means.

The CyberCert.xls 1311 file is split into 2 files CyberSign1.xls 1317 and CyberSign2.xls 1319. CyberSign2.xls contains only the rows associated to the MSI packages and CyberSign1.xls contains the rows corresponding to the other executable file. CyberSign1.xls is copied to the "Step 6 – CyberSign (Pass #1)" folder in 1110 in Fig. 11, and CyberSign2.xls is copied to the "Step 8 – CyberSign (Pass #2)" folder.

Step 5 at 1316 includes having a certification authority (CA) 1315 located at the game developers' site or controlled by an authorized trusted party such as VeriSign generating certificates in accordance with the details provided in the CyberCert.xls 1311 file, that is, with a subject name created in accordance with the method detailed relative to Fig. 3. An automated process CyberCert.exe 1318 executing on the off-line CA computer Windows server named CS11 1314 may automate the generation of the PKI public certificates 1326 and the associated private keys 1328 using the CyberCert.xls 1311 file.

The trusted root certificate for the authorized CA 1320 is supplied to the certification lab, the game regulators or other parties for reference and for importing as a trusted root into the ICE computer system and the gaming system certificates store.

The public certificates 1326 and their associated private keys 1328 are forwarded to the DEV computer 1332 of the ICE system in encrypted form on a removable media such as a floppy disk, a CD-ROM or a USB disk 1324, or alternatively transferred by secure communication means. Public certificates 1326 and their associated private keys 1328 that are associated with the MSI packages are copied into the "Step 6 – CyberSign (Pass #1)" folder in 1110, and the other public certificates 1326 and their associated

-30-

private keys 1328 that are associated with other software components are copied to the “Step 8 – CyberSign (Pass #2)” folder.

Step 6 1336 includes steps of code signing the non-MSI executable components listed in the CyberSign1.xls 1317 file using the corresponding public certificates 1326 and their private keys 1328. The code signing may be performed using the SignCode.exe utility provided by Microsoft, or equivalent. A password may be required for the private key depending on the security option selected when generating the certificate at the CA. The CyberSign.exe process 1330 may automate the code-signing of all the non-MSI executable components listed in the CyberSign1.xls 1317 file using the friendly name, file type, part number and version (including build number) given in each row. The CyberSign.exe process may call the SignCode.exe utility or the equivalent API. During the code signing process, the compiled executable software components may be replaced at 1339 by their code-signed form. Step 6 is designated as “CodeSign Pass#1” 1338.

Step 7 at 1344 includes re-building all the MSI install packages 1345 performed during step 3 at 1242. This time, the MSI packages contain the non-MSI code-signed executable components.

Step 8 at 1340 includes code signing the MSI executable components listed in the CyberSign2.xls 1319 file using the corresponding public certificates 1326 and their private keys 1328. The code signing may be performed using the SignCode.exe utility provided by Microsoft, or equivalent. A password may be required for the private key depending on the security option selected when generating the certificate at the CA. The CyberSign.exe process 1330 may automate the code-signing of all the MSI executable components listed in the CyberSign2.xls 1319 file using the friendly name, file type, part

-31-

number and version (including build number) given in each row. The CyberSign.exe process may call the SignCode.exe utility or the equivalent API. During the code signing process, the executable MSI software components may be replaced 1341 by their code-signed form. Step 8 is designated as "CodeSign Pass#2" at 1342. The executable MSI
5 software components are copied as shown at 1371 to the CD Pre-Burn repository 1372.

Because of the necessity of performing step 7, the CyberSign 1330 code-signing process to be used for the ICE (Integrated Certification Environment) is designated a "2-Pass code-sign", as indicated at 1334.

Step 9 1366 includes (a) configuring the software restriction policy (SRP) 1360
10 for the ICE system test gaming terminals (via the active directory 1350 in the domain controller DC) with the certificate rules corresponding to the certificate produced at step 5 (the *.p7b certificate at reference numeral 1326 may be converted to *.cert certificates for compatibility reasons when configuring the SRP); (b) configuring the Software Installation Policy (SIP) 1368 for the ICE system test gaming terminals with the MSI
15 packages produced at step 7, then (c) using the GPMC (Group Policy Management Console) or equivalent service, exporting the SIP via SIP export scripts 1362 and the SRP via SRP export scripts 1364 (the policy export facility is available in the Group Policy Management Console GPMC 702, 704). These SIP and SRP export scripts may be copied into the folder "Step 9 – SIP & SRP" folder in 1110. These SIP and SRP
20 export scripts may be later imported in the gaming operator's 1010 gaming system for enforcing the policies on the game components. SIP export scripts 1362 and SRP export scripts 1364 are stored in the CD Pre-Burn repository 1372 (or into the folder "Step 10 – CD Burn – Casino Release" folder in 1110).

-32-

Step 10 at 1374 includes steps of burning at 1384 to a CD-ROM 1376 or other removable media the content of the CD Pre-burn repository 1372 comprising (a) the executable MSI software components 1371; (b) the SIP export scripts 5 1362 and SRP export scripts 1364 and (c) other automation scripts in order to automate the installation of (a) and (b). A copy of CD-ROM 1376 may be forwarded (a) to the gaming operator's 1010 gaming system for game deployment (such as a casino 1379), (b) to the certification lab 1378, and (c) a trusted party 1377 such as a lawyer or in escrow for impartial reference in case of later dispute. The CD-ROM 1376 may later be inserted at 1050 in the gaming operator's 1010 gaming system for game deployment.

10 Step 11 at 1370 includes steps of (a) taking a snap-shot 1387 of the entire development environment for a selected certified game (Visual Studio repository 1302 and Visual Source Safe repository 1214 1218 that contains all the source file, the compiled code-signed executable files and dependant executable files, the non-executable files, project solution, automation scripts, the source and compiled signed 15 code from other development platforms, the media assets from media development platforms such as MacroMedia Director 1228); in (b) taking a snap-shot 1387 of the code-signed MSI installation packages; in (c) optionally encrypting them; and then in (d) copying them into a CD pre-burn repository 1388 (or into the folder "Step 12 – CD Burn – VS Snapshot" folder in 1110).

20 Step 12 at 1386 includes steps of burning at 1382 to a CD-ROM 1380 or other removable media the content of the CD Pre-burn repository 1388 comprising the software components of step 11. A copy of CD-ROM 1380 may be forwarded to the

-33-

certification lab 1378 and to a trusted party 1377 such as a lawyer or in escrow for impartial reference in case of later dispute.

Steps 4 to step 12 should be carried out each time a source code is being recompiled subsequent to a modification because a unique certificate must be associated
5 to each build. Deviating from this order may jeopardize certificate integrity because of the risk of a human error that may result in the wrong certificate being used during the code signing process.

Fig. 14 illustrates assignment of policies by banks of gaming machines. Reference numeral 1400 in Fig. 14 shows the grouping of gaming terminal and the
10 associated enforced policies. In this illustration, the Group Policy Management console 1402 may be configured such that the active directory Organization Unit (OU) named "Gaming Terminals – Floor" at 1404 is architected to regroup the gaming terminals in "banks" or sub-Organization Units (sub-OUs) identified by 200A0x 1406, 200B0x 1408, 200C0x 1410, and 200D0x to 200K0x at reference numeral 1412. Each bank contains a
15 predetermined number of gaming terminals, in multiples of 8 units, for example.

Noting the hierarchical tree composed of the OUs and sub-OUs illustrated at 1400, all the policies 1414 apply to the OU "Gaming Terminals – Floor" 1414 which contains all the sub-OUs 1406 1408 1410 and 1412. Using this technique, all the policies 1414 may apply to all the 3000 gaming terminals of a large casino. In the same manner,
20 the policies 1416, 1418 apply to the bank 1406; the policies 1420, 1422 apply to the bank 1408; and the policies 1424, 1426 apply to the bank 1410.

In the illustration, the exemplary game named "Roulette" is assigned a policy named "Sbm1.5 – SIP – Roulette (GLI)" 1416 which configures the Software Installation

Policy (SIP) and a policy named "Sbm1.5 – SRP – Roulette (GLI)" 1418 which configures the Software Restriction Policy (SRP) for that game.

In the same manner, the exemplary game named "Infinity" is assigned a policy named "Sbm1.4 – SRP – Infinity (GLI)" 1424 which configures the Software Installation
5 Policy (SIP) and a policy named "Sbm1.4 – SRP – Infinity (GLI)" 1426 which configures the Software Restriction Policy (SRP) for that game.

The keyword "Sbm1.4", in this example, denotes the certification submission number 1.4, and the keyword "GLI" denotes the certification lab GLI (Game Laboratories International) approving the Infinity game software.

10 In the illustration, all of the game terminals regrouped in the bank 200A0x shown at 1406 are, therefore, configured to execute the Roulette game, all the game terminals in the bank 200B0x shown at 1408 are configured to execute the Roulette game and the Infinity game, and all the game terminals in the bank 200C0x shown at 1410 are configured to execute the Infinity game.

15 Fig. 15 shows the enforcement of a Software Installation Policy (SIP). In Fig. 14, banks of gaming terminals are configured to execute authorized games using SIPs and SRPs policies. However, in order for the gaming terminals to be able to install a game, the associated Software Installation Policy must be enforced. At 1500, Fig. 15 illustrates a method for enforcing a Software Installation Policy by "linking" the policy, according
20 to an embodiment of the present invention. This is accomplished in the Group Policy Management console 1502 by, e.g., right-clicking the selected policy 1504, 1506 "Sbm3.3 – SIP – INFINITY_95" associated to the Infinity game with a Return To Players (RTP) percentage of 95% and selecting the "link Enabled" attribute 1514. The

software components for the Infinity_95 game contained in the two MSI installation packages 1510 and 1512 will subsequently be installed, provided the associated SRPs are configured to authorize execution of these two MSI packages (refer to description for Fig. 16). Alternatively, the same procedure may be automated via an API called from an appropriate application. It is to be noted that the linking of the policy will in fact enable the enforcement of the policy, but the policy will only be enforced on the gaming terminal when a gpupdate command or equivalent command is performed at the terminal; a terminal reboot may also be required for the policy to be enforced. Also to be noted is that policy changes are automatically distributed by the Windows server operating system throughout the network connected gaming system at periodic intervals; this automatic process may preferably be disabled such as to obtain more predictable policy enforcement changes by issuing explicit commands instead.

Package 1512 (friendly name: Infinity95.msi) contains the executable software components for the Infinity game and package 1510 (friendly name: Infinity95.Config.msi) contains the configuration files (the non-executable files) for the Infinity game. Package Infinity95.Config.msi 1510 is re-installed in the process 938.

Fig. 16 illustrates the enforcement of a Software Restriction Policy (SRP). In Fig. 14, banks of gaming terminals are configured to execute authorized games using SIPs and SRPs policies. However, in order for the gaming terminals to be able to execute the games, the policies must be enforced. Fig. 16 at 1600 illustrates a method for enforcing a Software Restriction Policy 1608 by "linking" the policy. This is accomplished in the Group Policy Management console 1602 by, e.g., right-clicking the selected policy 1604, 1606 "Sbm3.3 - SRP - INFINITY_95" associated to the Infinity

-36-

game with a Return To Players percentage (RTP) of 95% and selecting the "link Enabled" attribute 1624.

The certificate rules 1610, 1616 and 1620 that are configured with the "Unrestricted" attribute 1618, 1622 authorize the installation of the software components for the Infinity_95 game contained in the two MSI installation packages 1510 and 1512 by authorizing the unique PKI certificate associated to those MSI produced in accordance with the present method. The ".dll" executable software component 1612 is authorized, has its security level attribute set to "Unrestricted" and is, therefore, authorized to execute once it is installed.

The two MSI installation packages 1510 and 1512 for installing the software components for the Infinity_95 game have their associated unique PKI certificate 1616 and 1620 (produced in accordance with the method described herein) configured with the "Unrestricted" security level attribute 1618, 1622 via the certificate rules 1610, thus enabling (or authorizing) execution and installation of the software components for the Infinity_95 game.

The ".dll" executable software component contained in the 1512 package has its security level attribute set to "Unrestricted" thus it is authorized to execute once it is installed.

Alternatively, the same procedure may be automated via an API called from an appropriate application. It is to be noted that the linking of the policy will in fact enable the enforcement of the policy, but the policy will only be enforced on the gaming terminal when a gpupdate command or equivalent command is performed at the terminal; a terminal reboot may also be required for the policy to be enforced. Also to be

noted is that policy changes are automatically distributed by the Windows server operating system throughout the network connected gaming system at periodic intervals; this automatic process may preferably be disabled such as to obtain more predictable policy enforcement changes by issuing explicit commands instead.

5 Fig. 17 illustrates a method at 1700 to enforce a policy at a predetermined time, according to an embodiment of the present invention.

Enabling enforcement of policies as described relative to Fig. 15 and Fig. 16 may be carried out interactively by an authorized user at predetermined authorized times, or alternatively may be controlled by a process at predetermined authorized times via the
10 appropriate API. At the central system 1702 (the game download server in this illustration) at a given time 1704, a user or a process may verify a change 1706 in the list of games to be made available to players on a selected set of gaming terminal banks. In case of a schedule change as shown at 1710 (or other reasons such as introducing a new game or revoking an existing game), policies on the domain controller 1714 are being
15 changed accordingly either interactively by a user in the Group Policy Management console as described for Fig. 15 and Fig. 16, or by a process via the equivalent APIs 1712. The changed policies are being enabled for enforcement at 1716 in the domain controller.

In a casino, although new games may be scheduled to be downloaded to gaming
20 terminals and activated at predetermined times, it is a requirement that games are not to be changed while a player is playing. In practical terms, it is considered that a player terminates playing when his or her credit balance remains at zero for a predetermined period of time. The predetermined period time should be sufficient to allow the player to

enter a new bill or other form of credit or payment instrument to continue playing. Therefore, the game application software on each game terminal continually tests for this condition (credit = 0 for a predetermined period of time) before checking for change in policy, enforcing the policy changes and then updating the menu of games to be made
5 available to the next player.

Upon power-up, each gaming terminal 1718 executes a boot 1720, loads its operating system 1722 and enforces the policies 1724 that are configured at the time of the start-up process. When the game application starts at 1726, it displays a menu of authorized activated games as shown at 1727 to the player using for example the
10 dynamic method described relative to Fig. 19. Whenever the player balance is non-zero 1728, 1730, the player may play as shown at 1732 the games listed on the menu in accordance with the enforced policies. When the player's balance reaches zero at 1734 and remains zero for a predetermined period of time, it is considered that the player is no longer playing. The gaming application of the gaming terminal may then verify at 1736
15 if a policy has changed 1738. This may be done via the RegisterGPNotification. The RegisterGPNotification function enables an application to receive notification when there is a change in policy. When a policy change occurs, the specified event object is set to the signaled state. Additional details regarding the RegisterGPNotification function may be found at [http://msdn.microsoft.com/library/default.asp?url=/library/en-](http://msdn.microsoft.com/library/default.asp?url=/library/en-us/policy/policy/registergpnnotification.asp)
20 [us/policy/policy/registergpnnotification.asp](http://msdn.microsoft.com/library/default.asp?url=/library/en-us/policy/policy/registergpnnotification.asp).

At 1740, if there is no change in policy, the games listed on the menu will be unchanged for the next player. If there is a change in policy at 1742, the gaming terminal may enter into a process whereby the policies are enforced as shown at 1744, using for

example the gpupdate.com service, the RefreshPolicy function or the RefreshPolicyEx function, or equivalent services or API. It is to be noted that the verification of change in policy and the enforcement of the changed policies may be carried out by each terminal independently.

5 The RefreshPolicy function causes policy to be applied immediately on the client computer. Additional details regarding the RefreshPolicy function may be found at <http://msdn.microsoft.com/library/default.asp?url=/library/en-us/policy/policy/refreshpolicy.asp>

10 The RefreshPolicyEx function causes policy to be applied immediately on the computer. The extended function allows specifying the type of policy refresh to apply. Additional details regarding the RefreshPolicyEx function may be found at <http://msdn.microsoft.com/library/default.asp?url=/library/en-us/policy/policy/refreshpolicyex.asp>

15 Once the change in policy is enforced at 1744, the gaming terminal may reboot as shown at 1748 or exit and re-enter the gaming application, which would dynamically recreate the menu list of games 1727 to be made available to the next player, as detailed at Fig. 19.

20 A similar method relying on explicit WMI calls and administrative templates (*.adm) may be applied to obtain the same result in gaming environments whereby the domain controller active directory is not available such is the case with gaming terminals connected in WAN (Wide Area Network) whereby the network bandwidth is limited or the network availability is poor.

An alternative method relying on SMS (System Management Server) code download instead of SIPs (Software Installation Policy) for installing software components and software MSI packages may be used. However, the executable software components remains under SRP (Software Restriction Policy) in accordance with the
5 unique PKI certificate generated for each component as described in the invention.

Fig. 18 shows a close-loop enforcement of a policy, according to an embodiment of the present invention. Fig. 18 at 1800 illustrates a method to enforce a selected policy as the result of observing the gaming activity. The method is directly derived from Fig. 17 whereby the policy change 1716 takes place at 1804 and is selected from a choice of
10 pre-configured policies, for example in a look-up manner, whereby a policy would result in making available to the players a menu of games 1812 (1727 in Fig. 17) to provoke a given gaming activity change which may be monitored in real-time at 1816. The observed activity 1818 may then be compared 1820 to predetermined businesses objectives 1822 and a correction or modification may be applied by selecting a new
15 policy that would change the list of games available on a selected aggregate of gaming terminals 1810. For example, due to a long queue of people who want to play the Infinity game, a greater number of banks of gaming terminals may be configured to make the Infinity game available to players on these terminals. Another reason for applying a new policy might be if a particular area of the casino floor is heavily populated with players
20 while another area is empty. Suppressing some popular games in a highly frequented area and adding them to the less frequently area may help spread the player distribution within the casino or gaming area more evenly. Yet another reason for applying a new

policy could be if the gaming activity is low, then games with a higher RTP (return to player), let us say 98% instead of 95%, may be activated in some areas to boost activity.

The process may involve several subsystems as illustrated in Fig. 18: the central game control 1802 wherein policies are selected, the domain controller 1806 that enables
5 enforcement of the policies 1808, a selection set of gaming terminals 1810 wherein each gaming terminal enforces the policies and make the selected games available to the player 1812, a central game monitoring system 1814 that produces activity reports in real time 1816.

The process shown at 1820 of comparing the observed activity 1818 and the
10 targeted activity 1822 and then selecting a change in game policies 1804 may be carried out by the floor manager or the floor director, or alternatively by a knowledge base process. In both cases, a close-loop enforcement of policies (relying on the unique PKI certificate SRP associated to each executable authorized and certified software component) is achieved resulting in the dynamic configuration of the gaming system,
15 either for LAN configurations (such as casino floors) or WAN configuration (such as video lottery terminals distributed across a large geographic area).

Fig. 19 at 1900 illustrates a method to generate dynamically the menu list of authorized games made available to the player on each gaming terminal, according to an embodiment of the present invention. The dynamic configuration of a large gaming
20 system whereby authorized games made available to players on selected group of gaming terminals using software restrictions policies at the central system may result is hundreds of different game menus. Reliance on SRPs for preventing non-authorized software components to execute is entirely based on a sound and demonstrable trusted

-42-

base; therefore the gaming system is trusted. Getting the list of authorized games to each gaming terminal would require configurations files to be sent from the central system to each of the gaming terminal; however, this would be illegal because the change in the list of games may affect the game outcome. This is clearly understandable when considering changing a game; let us say Infinity_95 with a RTP or 95% with Infinity_98 with a RTP of 98% at 10:00 PM, then back at 8:00 AM, and this each day except during the weekend, or at other times as a result of the closed loop process described at Fig. 18. Game regulators mandate that the process to manage this type of change be certified with secure means of the same order as when installing/downloading software components using a unique PKI method.

Embodiments of the present invention, therefore, provide secure means to update a list of authorized games to be offered to the player. The menu of authorized games offered to the player may be dynamically generated by each terminal without requiring the central system to dispatch the list of authorized games or having each terminal fetch the list of authorized games from the central system (both are illegal without extreme precaution of the same order as the installing/downloading of software components using a unique PKI method because they may affect the game outcome); this is achieved by having each terminal checking the certificate Software Restriction Policies enforced on the games (a unique PKI certificate being generated for each of the executable game components in accordance with the methods detailed in this document).

As illustrated in Fig. 19 at 1900, each terminal when executing the gaming application 1902 gets a list of the file names for the games available at 1904 from a trusted configuration file (an updated trusted configuration file may have been

downloaded in a certified code signed MSI package with the last game download) and a menu is initially compiled for this list. Attempts to execute each of the game entry module of the games contained in the list 1906 are made. If the game entry module is not found at 1910, the software components do not exist on the gaming terminal and the game is removed from the menu 1912, whereupon the process iterates to next game, as suggested at 1926 1928. If the execution of the game entry module is denied at 1916, 1918 because the Software Restriction Policy is preventing this game to execute, the game is removed from the menu as shown at 1920 and the process iterates to next game, as shown at 1926 1928. If the execution of the game entry module is successful at 1922, then the game is authorized and may be added to the games menu offered to the player. The process iterates through other games in the list, as shown at 1928, 1930, 1942, 1906, if any. Once the iteration is completed at 1932, the games menu may be composed at 1934 and the menu is displayed to the player at 1936.

Fig. 20 shows a companion Hello component, according to another aspect of the present invention. Reference numeral 2000 in Fig. 20 illustrates a method to generate a code signed companion software component. Each game comprises an aggregate of executable and non-executable software components, usually comprising files such as *.exe, *.dll, *.dat, *.xml. In general, all the software components are dependent of one component named the main program or the game entry. Starting the execution of the main game component is a lengthy process, as a large number of dependent executable components and graphics need to be verified (SRP verification) and started. Currently, there is no API available in the Windows operating system client computer for verifying

the status of a Software Restriction Policy enforcement on a given software component applicable to that client computer.

Another embodiment of the present invention, therefore, provides a method to quickly verify the policy enforcement on a game without starting the entire game, in order to generate the list of available games to be made available to the player in a menu. For each game, a very short companion .dll file may be created having, for example, only one line of code « Return "HELLO" » which would return the exemplary "HELLO" string when called. Assuming "Infinity.dll" 2010 is the main game component file name 2002 (or friendly name), then the companion file may be named "Infinity.Hello.dll" 10 2018. Preferably, the companion's 2018 source code would have in its assembly information a part number 2004 as shown at 2020 and a version number 2006 as shown at 2022 that is identical to the main component 2010 part number 2012 and a version number 2014, but this is not mandatory. In addition, assuming the PKI certificate's subject name 2008 associated to the Infinity.dll is "GDS.exe.0099-0001-00[1.0.101.0] 15 Infinity.dll" 2016, which is used for the code signing of the Infinity.dll, we may proceed with the code signing of Infinity.Hello.dll with the same 2026, 2028 "GDS.exe.0099-0001-00[1.0.101.0] Infinity.dll" certificate, as shown at 2024.

It is to be noted that code signing two distinct software executables with the same certificate is a deviation from the method taught earlier in this document. However, the 20 fact that the role of the companion file is very well defined, as having for example only one line of code « Return "HELLO" » which would return the "HELLO" string when called, this does not present an issue with the regulators or the certification lab.

Fig. 21 shows steps that may be carried out to search for games on each gaming terminal, according to yet another embodiment of the present invention. Reference numeral 2100 in Fig. 21 illustrates a method to quickly generate dynamically the list of games installed on each gaming terminal using the companion software component described above. The process of dynamically generating the game selection menu may be optimized in many ways in order to reduce the overhead of starting the execution of a game to check if it is authorized. However, if the aim is to sense for the enforced SRP or SIP applied to the game or detect local availability of the game software components, then such optimizations (among other possible variations) should be considered to be within the scope of the invention as defined by the claims hereunder. According to an embodiment of the present invention, a method is presented herewith to quickly generate the list of available games to be made available to the player in a menu without transfer of a file from the server. Reference 2100 is identical to reference 1900 in Fig. 19 except for the first process 2104 whereby a file search process is performed for finding (or enumerating) file names with the “*Hello.dll” string, the “*” symbol being the standard wild character used in string searches. A list of the games installed on each gaming terminal may be quickly and dynamically generated by calling the companion software component of the game main component instead of calling the main component itself. The companion component may be as detailed at Fig. 20 or may be a similar construct.

The embodiments of the present invention described herein are also applicable to any of the subsystems available in a network connected gaming system that require preventing non-authorized software components to execute or affect game outcome, such as the gaming terminals, the game management system (CMS or MCS) that monitor and

control whole or part of the estate of gaming machines, the progressive jackpot systems, the bonussing systems as well as game payment verification systems such as IGT EasyPay and Cyberview PVU (Payment Verification Unit) and PVS (Payment Verification System). Gaming subsystems are tested against gaming standards such as those produced by GLI (Game Laboratory International); the game standards are mandated by game regulators in accordance with local regulation and laws. The network-connected subsystems may be located within the premises accommodating the estate of gaming machines (connection via a LAN) or outside of the premises (connection via a WAN).

10 The methods described in the document rely on software installation policies and Software Restriction Policies which may be configured (a) via the domain controller active directory, as this is advantageously the case whenever the network connection is a LAN, and which may also be configured (b) to each of the local computers via WMI services (Windows Management Instrumentation) or administrative templates (.adm files) in order to configure and enforce local group policies when a domain controller is not available as this is the case whenever the network connection is a WAN. Microsoft SMS (Systems Management Server) may be used as an alternative to using software installation policies.

20 The methods described in the document leverage on software installation policies and/or software restriction policies technology implemented in Microsoft Windows operating system. Whenever similar technology is implemented in other operating systems such as Linux, Unix, Windows CE and QNX, it is considered as part of the invention herein.

In an other embodiment of the invention, in order to make game regulators more at ease with the huge shift in paradigm from prehensile physically secured ROM based gaming machines (whereby access to the ROM is via multiple layers of keys locks and tamper detectors), to a totally virtual or volatile fashion of downloading game code via a network, it may be advantageous to perform download of the game code when the gaming machine is not operational. Consequently, the network downloading of game code from a central repository may not interfere with the games. This is accomplished by terminating all gaming software in order to transform the gaming machine into a generic PC, then transferring the game software under the control of the operating system using pervasive network code download available in most information technology networked environments. An "Out-of-service" message may be displayed on the screen to indicate that the machine is no longer playable, thus is no longer a gaming machine. Once the game code is downloaded by the generic PC, the game code is verified for trustworthiness and is executed, thus transforming the generic PC back into a gaming machine.

WHAT IS CLAIMED IS:

1. A PKI certificate architecture for a network connected gaming system, wherein each software component within the gaming system subject to receive certification is signed with a distinctive certificate, the certificate being uniquely
5 identified by at least one field.
2. A PKI certificate architecture according to claim 1, wherein the each software component is authorized by a regulatory authority.
3. A PKI certificate architecture according to claim 1, wherein the distinctive certificate is produced by the certification lab, by the gaming system supplier
10 or by the trusted party designated by the regulatory authority.
4. A PKI certificate architecture according to claim 1, wherein each software component is signed by the certification lab, by the gaming system supplier or by the trusted party designated by the regulatory authority.
5. A PKI certificate architecture according to claim 1, wherein the at least
15 one field is the field denoted as the "issued to" field, the "subject name" field, the "CommonName" field or the "publisher" field.
6. A PKI certificate architecture according to claim 1, wherein the at least one field comprises at least one of fields and field extensions.
7. A PKI certificate architecture according to claim 1, wherein the at least
20 one field comprises at least one of:
a software component part number;

- a software component major version number;
- a software component minor version number;
- a software component build number;
- a software component revision number;
- 5 a software component project name;
- a software component type of software component;
- a software component language variant;
- a software component game regulation variant;
- a software component friendly name;
- 10 an identification of the certification laboratory, and
- an identification of the client.

8. A PKI certificate architecture according to claim 7, wherein each of the at least one field is a concatenation of a selected set of fields.

9. A PKI certificate architecture according to claim 1, wherein at least a
15 portion of the at least one field is reported in the windows event log upon execution of the software component.

10. A PKI certificate architecture according to claim 1, wherein at least a portion of the at least one field is reported in the source field of the windows event log upon execution of the software component.

- 20 11. A PKI certificate architecture according to claim 1, wherein at least a portion of the at least one field is reported in the windows event log upon execution of

-50-

the software component in a predetermined event log bin upon execution of the software component.

12. A PKI certificate architecture according to claim 1, wherein at least a portion of the at least one field is traceable in at least one of:

- 5 source code;
- Windows File Properties;
- Trusted Inventory;
- Windows Event Log;
- Software Restriction Policies, and
- 10 Certificate Store.

13. A PKI certificate architecture according to claim 1, wherein the network connected gaming system is connected in at least one of a local area system and wide area network.

14. A PKI certificate architecture according to claim 1, wherein the network
15 connected gaming system comprises gaming terminals and/or gaming servers.

15. A PKI certificate architecture according to claim 1, wherein the at least one field contains identification information delimited with file-name-allowed non-alphanumeric characters to facilitate human identification, string searches and file searches.

20 16. A PKI certificate architecture according to claim 1, wherein a selected set of identification information making up the at least one field are used for making up the

-51-

file name of PKI certificate related files such as *.CER, *.P7B and *.PVK such as to facilitate human identification, string searches and file searches.

17. A method for a network connected gaming system to prevent unauthorized software components from executing, comprising the steps of:

5 producing a separate PKI certificate for each software component subject to receiving certification;

code signing each software component subject to receiving certification with its respective PKI certificate, and

10 configuring Software Restriction Policy certificate rules to allow execution of a selected set of each software component subject to receiving certification.

18. A method according to claim 17, further comprising the step of configuring Software Restriction Policy rules to prevent execution of unauthorized software.

15 19. A method according to claim 17, further comprising the step of configuring Software Restriction Policy rules to prevent execution of all not explicitly authorized software.

20. A method for a network connected gaming system to enable only authorized software components to execute, comprising the steps of:

20 configuring a Software Restriction Policy for each authorized software component, and

enforcing the Software Restriction Policy.

-52-

21. A method for a network connected gaming system according to claim 20, wherein the authorized software components are mandated by a regulatory body.

22. A method for a network connected gaming system to enable only authorized software components to execute, comprising the steps of:

5 configuring a certificate Software Restriction Policy for each authorized software component;

configuring a path Software Restriction Policy to prevent unauthorized software components from executing;

10 configuring a path Software Restriction Policy to prevent non-explicitly authorized software components from executing;

enforcing the certificate Software Restriction Policies, and

enforcing the path Software Restriction Policies.

23. A method for a network connected gaming system according to claim 22, wherein the authorized software components are mandated by a regulatory body.

15 24. A method for a network connected gaming system to enable only authorized software components to execute, comprising the steps of:

producing a separate PKI certificate for each software component subject to receive certification;

20 signing each software component subject to receive certification with the its respective separate PKI certificate;

configuring a certificate Software Restriction Policy for each of the respective separate PKI certificates, and

enforcing the certificate Software Restriction Policy for each of the respective separate PKI certificates.

25. A method for downloading authorized software components for a network connected gaming system, comprising the steps of:

5 code signing each authorized software component with a distinctive PKI certificate;

configuring install policies to install each code signed authorized software component;

10 configuring certificate rule policies to allow execution of the installed code signed authorized software component;

configuring enforcement of the policies.

26. A method for a network connected gaming system to enable selective execution of at least one authorized software component, comprising the steps of:

15 configuring Software Restriction Policies for the at least one authorized software component at a predetermined time;

unrestricting the Software Restriction Policies for the at least one authorized software component at a predetermined time;

enabling a link for the Software Restriction Policies for the at least one authorized software component at a predetermined time;

20 checking for a change of the Software Restriction Policies and if there is no policy change then looping to the beginning of this step, and

enforcing the change of the Software Restriction Policies at a predetermined time.

27. A method for a network connected gaming system according to claim 26, wherein the checking step includes checking for the change of the Software Restriction Policies whenever a predetermined timeout has expired subsequent to the player balance reaching zero and if there is no policy change then looping to the beginning of this step.

5 28. A method for a network connected gaming system according to claim 26, further comprising the step of displaying a list of authorized software to the player for selection.

29. A method for a network connected gaming system according to claim 26, wherein a rule for the Software Restriction Policies is at least one of certificate rule, path
10 rule, hash rule, Internet zone rule and registry path rule.

30. A method for a network connected gaming system according to claim 26, wherein the network connected gaming system is connected in at least one of a local area system and a wide area network.

31. A method for a network connected gaming system according to claim 26,
15 wherein the network connected gaming system comprises at least one of gaming terminals and gaming servers.

32. A method for a network connected gaming system according to claim 26, wherein the checking step includes executing the RegisterGPNotification function.

33. A method for a network connected gaming system according to claim 26,
20 wherein the checking step is bypassed.

34. A method for a network connected gaming system according to claim 26, wherein the enforcing step includes executing the gpupdate function.

35. A method for a network connected gaming system according to claim 26, wherein the enforcing step includes executing the gpupdate function followed by a
5 reboot.

36. A method for a network connected gaming system according to claim 26, wherein the enforcing step includes executing the RefreshPolicy or RefreshPolicyEx function.

37. A method for a network connected gaming system according to claim 26,
10 wherein the enforcing step includes executing the RefreshPolicy or RefreshPolicyEx function followed by a reboot.

38. A method for a network connected gaming system according to claim 26, further comprising the steps of:

configuring Software Installation Policies for the at least one authorized software
15 component at a predetermined time;

enabling a link for the software installation policies for the at least one authorized software component at a predetermined time;

checking for a change of the Software Installation Policies and if there is no policy change then looping to the beginning of this step, and

20 enforcing the change of the software installation policies.

39. A method for a network connected gaming system according to claim 38, wherein the checking step includes checking for the change of the software installation policies whenever a predetermined timeout has expired subsequent to the player balance reaching zero and if there is no policy change then looping to the beginning of this step.

5 40. A method for a network connected gaming system according to claim 38, wherein the checking step includes executing the RegisterGPNotification function.

41. A method for a network connected gaming system according to claim 38, wherein the checking step is bypassed.

42. A method for a network connected gaming system according to claim 38,
10 wherein the enforcing step includes executing the gpupdate function.

43. A method for a network connected gaming system according to claim 38, wherein the enforcing step includes executing the gpupdate function followed by a reboot.

44. A method for a network connected gaming system according to claim 38,
15 wherein the enforcing step includes executing the RefreshPolicy or RefreshPolicyEx function.

45. A method for a network connected gaming system according to claim 38, wherein the enforcing step includes executing the RefreshPolicy or RefreshPolicyEx function followed by a reboot.

46. A method for a network connected gaming system according to claim 38, further comprising the step of displaying a list of authorized software to the player for selection.

47. A method for a network connected gaming system according to claim 26,
5 further comprising the initial steps of:
monitoring the game activity of players, and
choosing the at least one authorized software components in order to adapt game offering on the gaming terminals.

48. A method for a network connected gaming system according to claim 47,
10 wherein the monitoring and choosing steps are carried out in a close-loop fashion such as to optimize player game activity in real-time.

49. A method for a network connected gaming system to enable selective availability of games on gaming terminals, comprising the steps of:
installing a plurality of game software on a selected set of gaming terminals;
15 choosing a selected set of installed game software to offer to players of the gaming terminals;
a first activating the chosen selected set of installed game software on a selected set of gaming terminals;
monitoring the game activity of the players on a selected set of gaming terminals;
20 modifying the selected set of installed game software to offer to players;
a second activating the modified selected set of installed game software on a selected set of gaming terminals.

-58-

50. A method for a network connected gaming system according to claim 49, wherein the monitoring, modifying and activating steps are executed in a close-loop fashion such as to optimize player game activity in real-time.

51. A method for a network connected gaming system according to claim 49,
5 further comprising the step of displaying a list of authorized software to the player for selection.

52. A method for a network connected gaming system according to claim 49, further comprising a step of downloading at least one authorized game software to a selected set of the of gaming terminals;

10 53. A method for a network connected gaming system to enable selective availability of games on PC based gaming terminals, comprising the steps of:

selecting game software to be made available to players on a selected set of gaming terminals;

terminating all gaming software on a selected set of gaming terminals to
15 transform each gaming terminals into a generic PC communicating in the network connected gaming system;

downloading via the network the selected game software to the generic PCs, and

starting the game software to transform the generic PCs into gaming terminals.

54. A method for a network connected gaming system according to claim 53,
20 further comprising the step of displaying an "out-of-service" message or equivalent message to the player while the gaming terminal is transformed into a generic PC.

55. A method for a network connected gaming system according to claim 53, further comprising the step of displaying a list of software to the player for selection.

56. A method for a network connected gaming system according to claim 53, wherein the game software is authorized by a regulatory authority.

5 57. A method for a network connected gaming system according to claim 53, wherein booting is at least one of cold-booting, hot-booting and power-on booting.

58. A method for a network connected gaming system according to claim 53, wherein the PC based gaming terminals run a version of the Microsoft Windows operating system

10 59. A method for a network connected gaming system according to claim 53, wherein the step of downloading game software uses the Software Installation Policy (SIP) feature of the Windows operating system.

60. A method for a network connected gaming system according to claim 53, wherein the step of downloading game software uses the Microsoft SMS Systems
15 Management Server.

61. A method for a network connected gaming system according to claim 53, further comprising the step of preventing unauthorized software from executing using the Software Restriction Policy feature.

62. A method for a network connected gaming system to enable selective
20 availability of games on PC based gaming terminals, comprising the steps of:

-60-

selecting game software to be made available to players on a selected set of gaming terminals;

terminating all gaming software on a selected set of gaming terminals to transform each gaming terminal into a generic PC communicating in the network

5 connected gaming system;

booting the generic PCs;

starting an operating system on the generic PCs;

downloading via the network the selected game software to the generic PCs, and

starting the game software to transform the generic PCs into gaming terminals.

10 63. A method for a network connected gaming system according to claim 62, further comprising the step of displaying an "out-of-service" message or equivalent message to the player while the gaming terminal is transformed into a generic PC.

64. A method for a network connected gaming system according to claim 62, further comprising the step of displaying a list of software to the player for selection.

15 65. A method for a network connected gaming system according to claim 62, wherein the game software is authorized by a regulatory authority.

66. A method for a network connected gaming system according to claim 62, wherein booting is at least one of cold-booting, hot-booting and power-on booting.

20 67. A method for a network connected gaming system according to claim 62, wherein PC based gaming terminals run a version of the Microsoft Windows operating system.

68. A method for a network connected gaming system according to claim 62, wherein the step of downloading game software uses the Software Installation Policy feature of the Windows operating system.

69. A method for a network connected gaming system according to claim 62,
5 further comprising the step of preventing unauthorized software from executing using the Software Restriction Policy feature.

70. A method for a network connected gaming system according to claim 62, wherein the step of downloading game software uses the Microsoft SMS Systems Management Server.

10 71. A method for a network connected gaming system to prevent unauthorized executable files from executing, comprising the steps of:

packaging the authorized executable files into a code signed MSI installation package;

15 configuring certificate rule policies to enable execution of the code signed MSI installation package;

enforcing the policies, and

executing the code signed MSI installation package upon every computer startup or upon a command.

20 72. A method for a network connected gaming system according to claim 71, wherein the code signing uses a distinctive PKI certificate for each MSI installation package.

-62-

73. A method for a network connected gaming system to prevent unauthorized executable code from executing, comprising the steps of:

packaging the authorized executable files into a code signed MSI installation package;

5 configuring certificate rule policies to enable execution of the code signed MSI installation package;

configuring enforcement of the policies, and

re-installing the code signed MSI installation package at every computer startup or upon a command.

10 74. A method for a network connected gaming system according to claim 73, wherein the code signing uses a distinctive PKI certificate for each MSI installation package.

75. A method for a network connected gaming system to prevent unauthorized non-executable files to affect game outcome, comprising the steps of:

15 packaging the non-executable files into a code signed MSI installation package;

configuring certificate rule policies to enable execution of the code signed MSI installation package;

configuring enforcement of the policies, and

20 executing the code signed MSI installation package upon every computer startup or upon a command.

76. A method for a network connected gaming system according to claim 75, wherein the code signing uses a distinctive PKI certificate for each MSI installation package.

77. A method for trusting at least one authorized non-executable software component certified to comply with regulatory requirements downloaded into a network connected gaming system, comprising the steps of:

packaging the at least one non-executable file into at least one code signed MSI installation package;

configuring certificate rule policies to enable execution of the at least one code signed MSI installation package;

configuring enforcement of the policies, and

re-installing the at least one code signed MSI installation package at every computer startup or upon a command.

78. A method for a network connected gaming system according to claim 77, wherein the at least one code signing uses a distinctive PKI certificate for each of the at least one MSI installation package.

79. A method for scheduling at least one authorized executable software component installed in a network connected gaming system, comprising the steps of:

packaging at least one authorized non-executable file that control the scheduling of the at least one authorized executable software component into at least one code signed MSI installation package;

-64-

configuring certificate rule policies to enable execution of the at least one code signed MSI installation package in a selected set of gaming terminals; and

configuring enforcement of the certificate rule policies; and

5 downloading the at least one code signed MSI installation package into a selected set of gaming terminals;

executing the at least one code signed MSI installation packages.

80. A method for scheduling at least one authorized executable software component according to claim 79, wherein the code signing uses a distinctive PKI certificate for each of the at least one MSI installation package.

10 81. A method for scheduling at least one authorized executable software component according to claim 79, further comprising the step of re-installing the at least one code signed MSI installation package at every computer startup or upon a command.

82. An automated platform to enable the on-going regulatory certification of a substantial number of authorized software components, comprising:

15 a reference platform representative of a target network connected gaming system and comprising a software-building environment located at the manufacturer's premises or designated subcontractors;

a certification platform located at a regulatory certification authority substantially identical to the reference platform, and

20 code-signing means for associating a distinctive PKI certificate with each authorized software component.

83. An automated platform according to claim 82, further comprising a secure communication link for enabling manufacturer or designated subcontractors to remotely configure the software build environment on the certification platform.

84. An automated platform according to claim 82, wherein the target code to
5 be downloaded to the network connected gaming system is tested by the certification laboratory.

85. An automated platform according to claim 82, wherein the target code to be downloaded to the network connected gaming system is compiled by the certification laboratory.

10 86. An automated platform according to claim 82, further comprising a secure communication link for enabling remote assistance.

87. An automated platform according to claim 82, further comprising a secure communication link for enabling users to carry out certification steps from a remotely located computer.

15 88. An automated platform according to claim 82, wherein the code signing means comprises a certificate authority under control of the manufacturer for generating certificates.

89. An automated platform according to claim 82, wherein the code signing means comprises a certificate authority under control of the regulatory certification
20 authority for generating certificates.

90. An automated platform according to claim 82, wherein the software-building environment of the reference platform and the software-building environment of the certification platform are maintained synchronized.

91. A method for a gaming terminal in a network connected gaming system to
5 generate a list of authorized games available to the players comprising the steps of:

enforcing Software Restriction Policy for preventing non-authorized software components from executing;

enforcing Software Restriction Policy for enabling execution of a selected set of authorized games;

10 attempting to execute each game, and

adding games that have not been denied execution to a menu list.

92. A method for a network connected gaming system according to claim 91, further comprising the step of removing games from the menu list for games that have been denied execution.

15 93. A method for a network connected gaming system according to claim 91, further comprising the step of removing games from the menu list for games whose executable file are not found .

94. A method for a gaming terminal in a network connected gaming system to generate a list of authorized games available to players comprising the steps of:

20 generating an executable companion file for each authorized game, wherein the executable companion file is substantially quicker to execute than starting execution of

-67-

the game and, wherein the code-signed PKI certificate associated to the companion file is identical to the code-signed PKI certificate associated to the game main module;

enforcing Software Restriction Policy for preventing non-authorized software components from executing;

5 enforcing Software Restriction Policy for enabling execution of a selected set of authorized games;

attempting to execute each companion file, and

adding only those games to a menu list whose companion file has not been denied execution.

10 95. A method for a network connected gaming system according to claim 94 further comprising the step of removing games from the menu list for games whose companion file is denied execution.

96. A method for a network connected gaming system according to claim 94, further comprising the step of removing games from the menu list for games whose
15 companion executable file is not found.

THIS PAGE BLANK (USPTO)

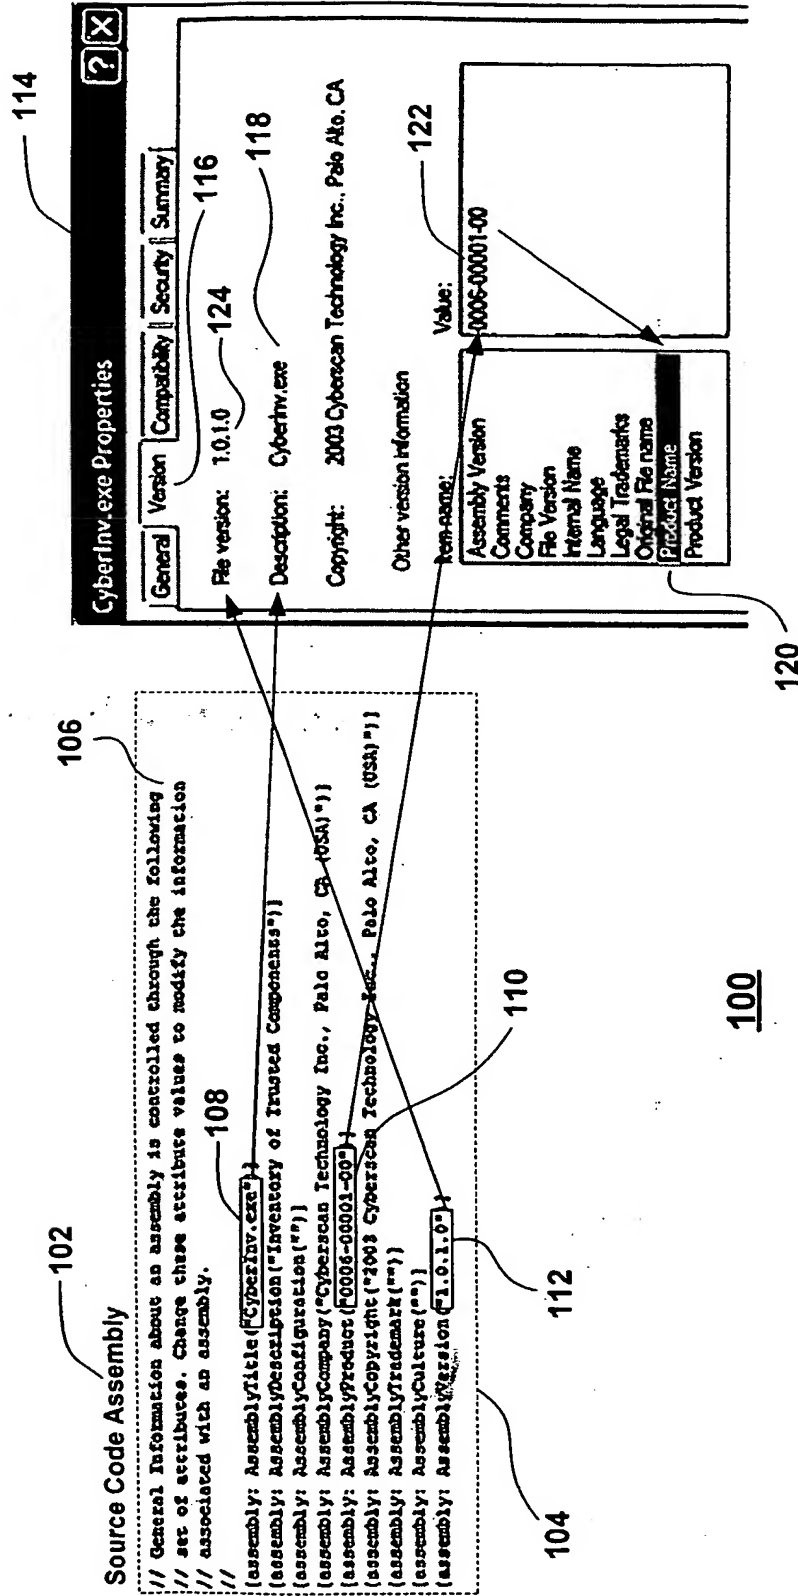


FIG. 1

THIS PAGE BLANK (USPTO)

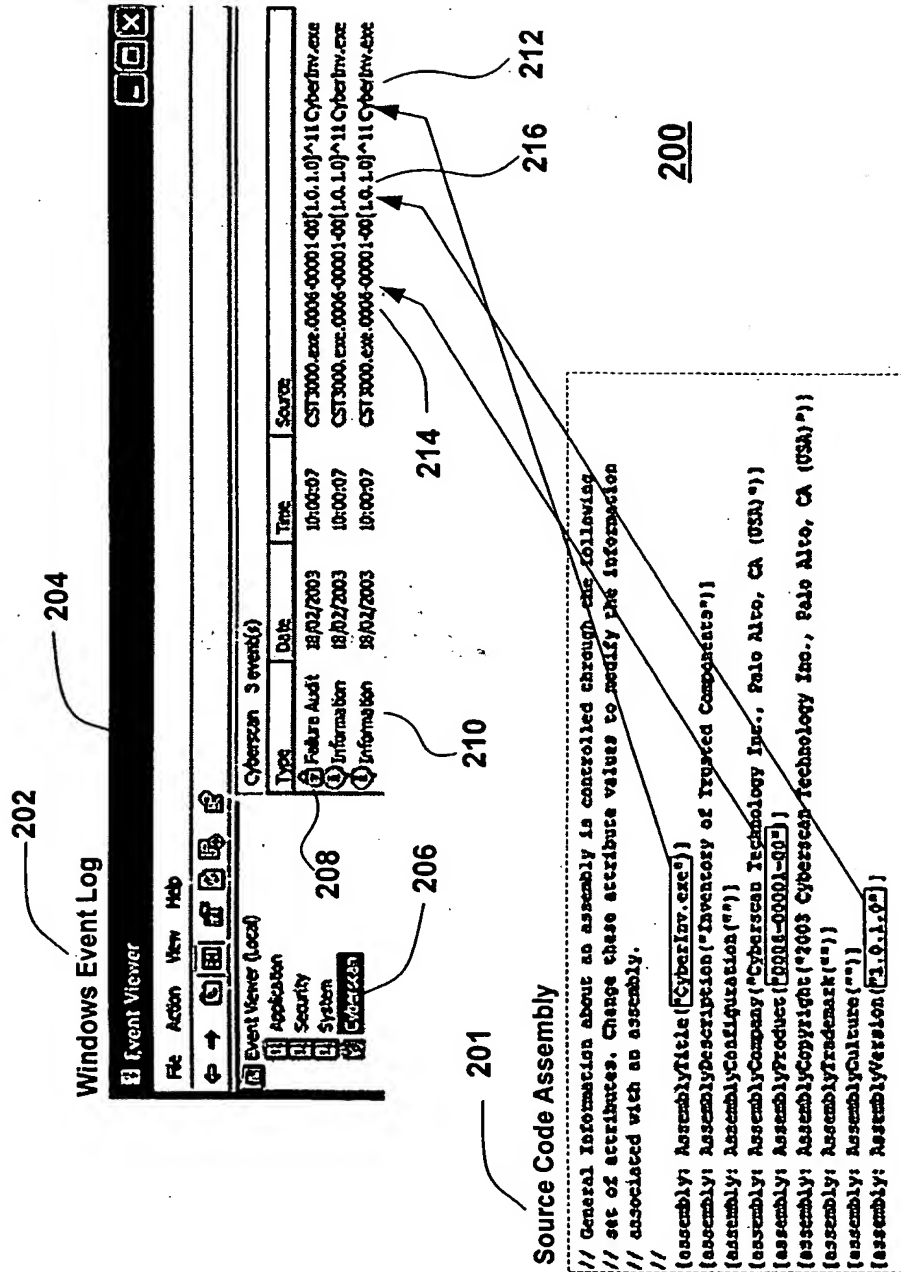


FIG. 2

THIS PAGE BLANK (USPTO)

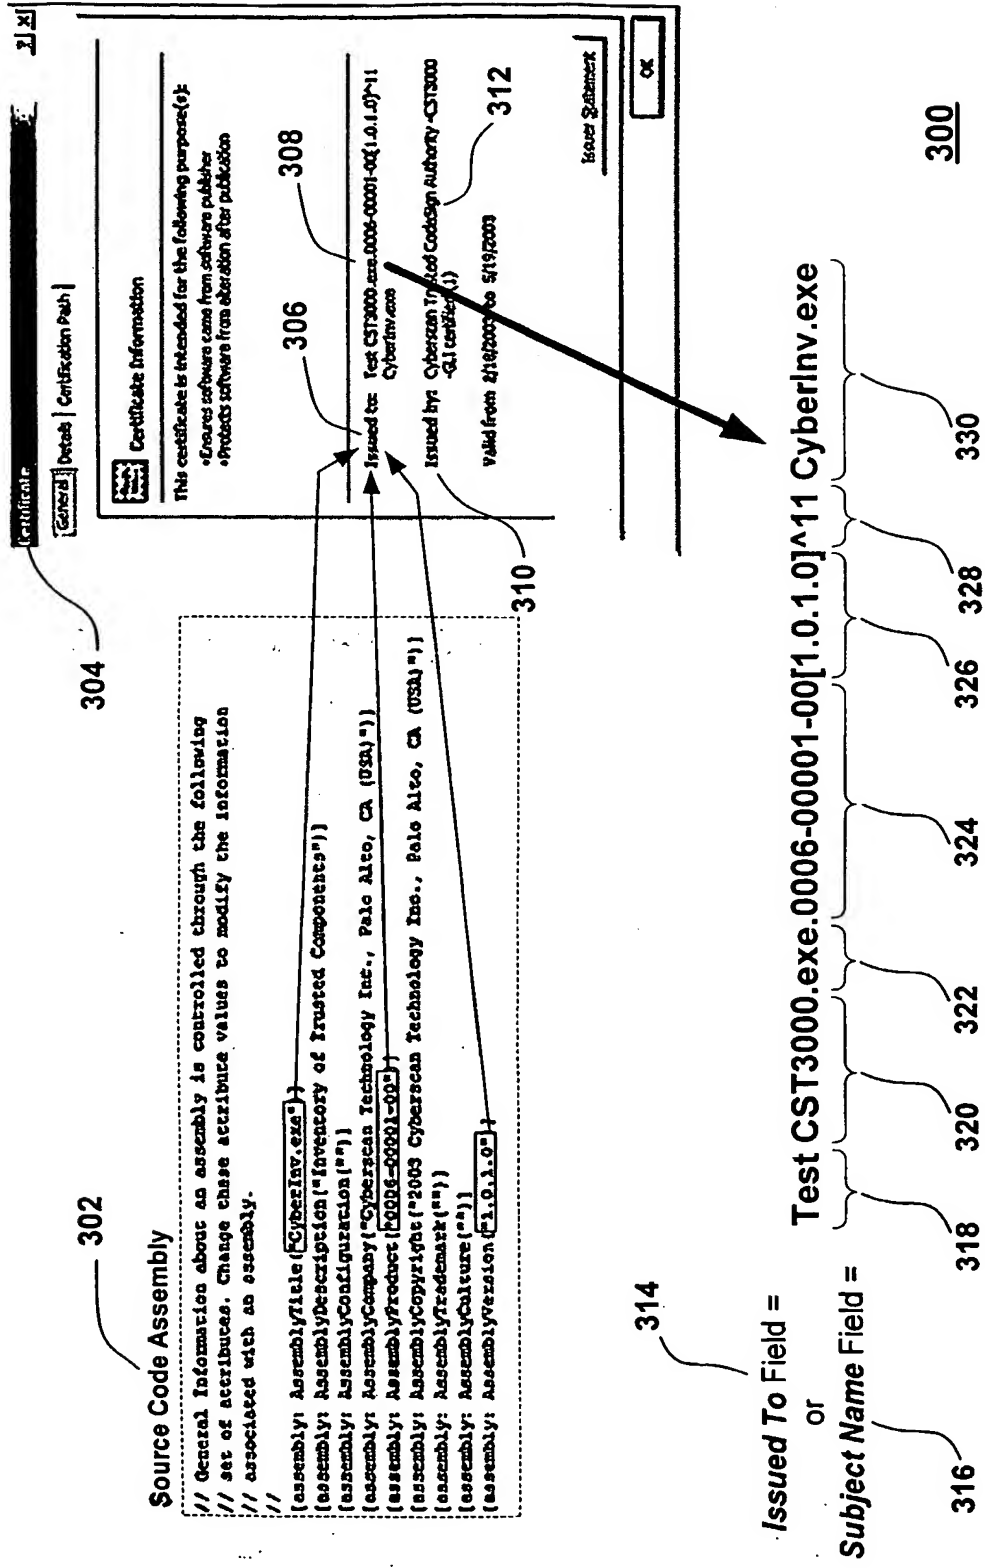


FIG. 3

THIS PAGE BLANK (USPTO)

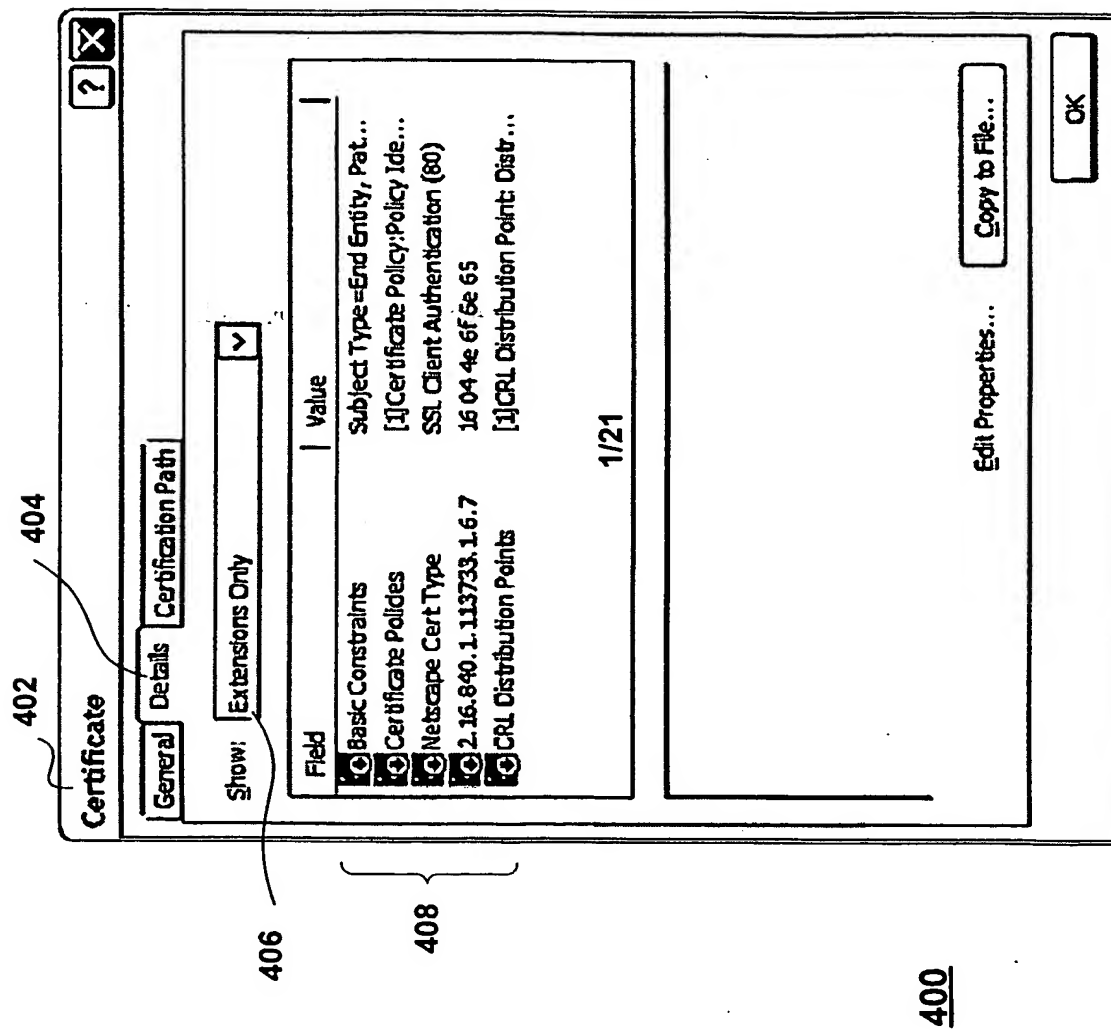


FIG. 4

THIS PAGE BLANK (USPTO)

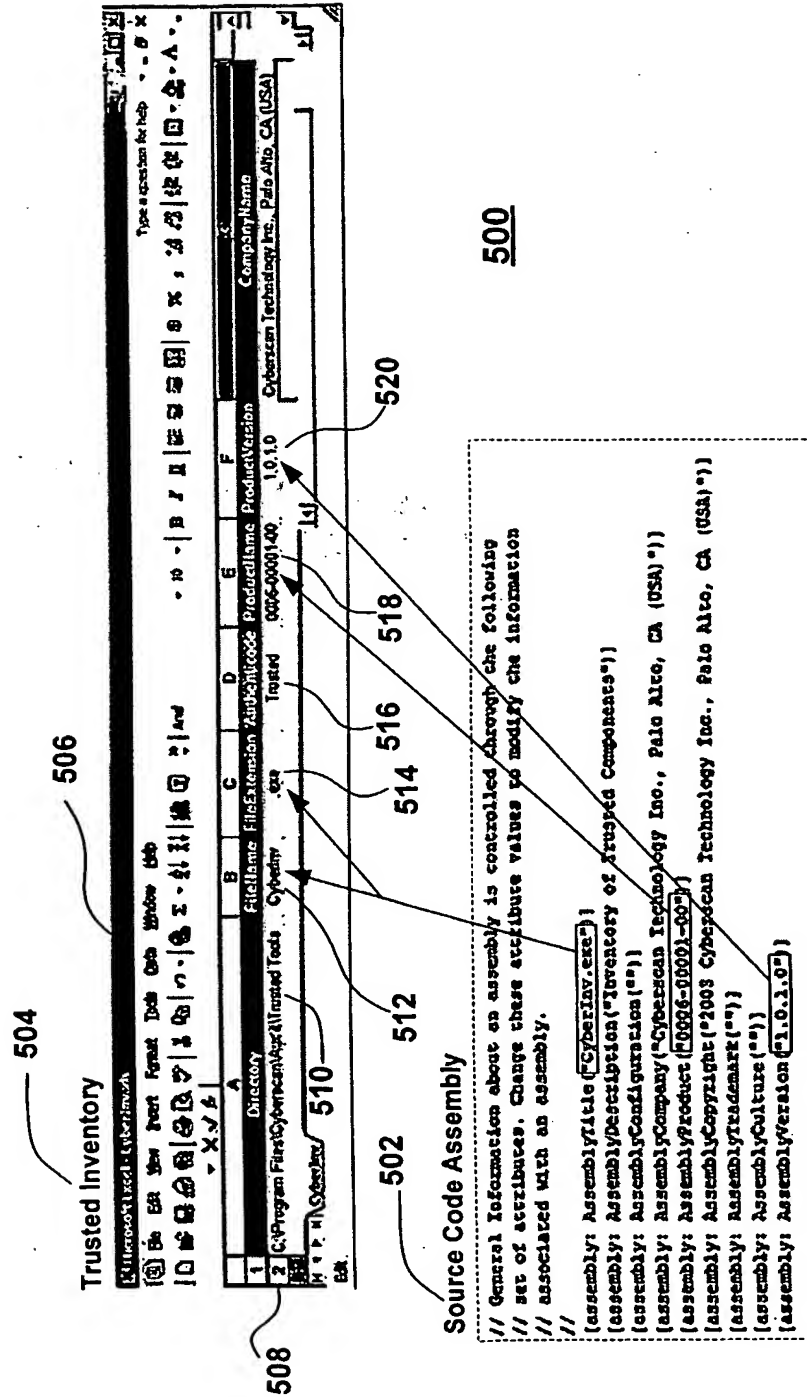


FIG. 5

THIS PAGE BLANK (USPTO)


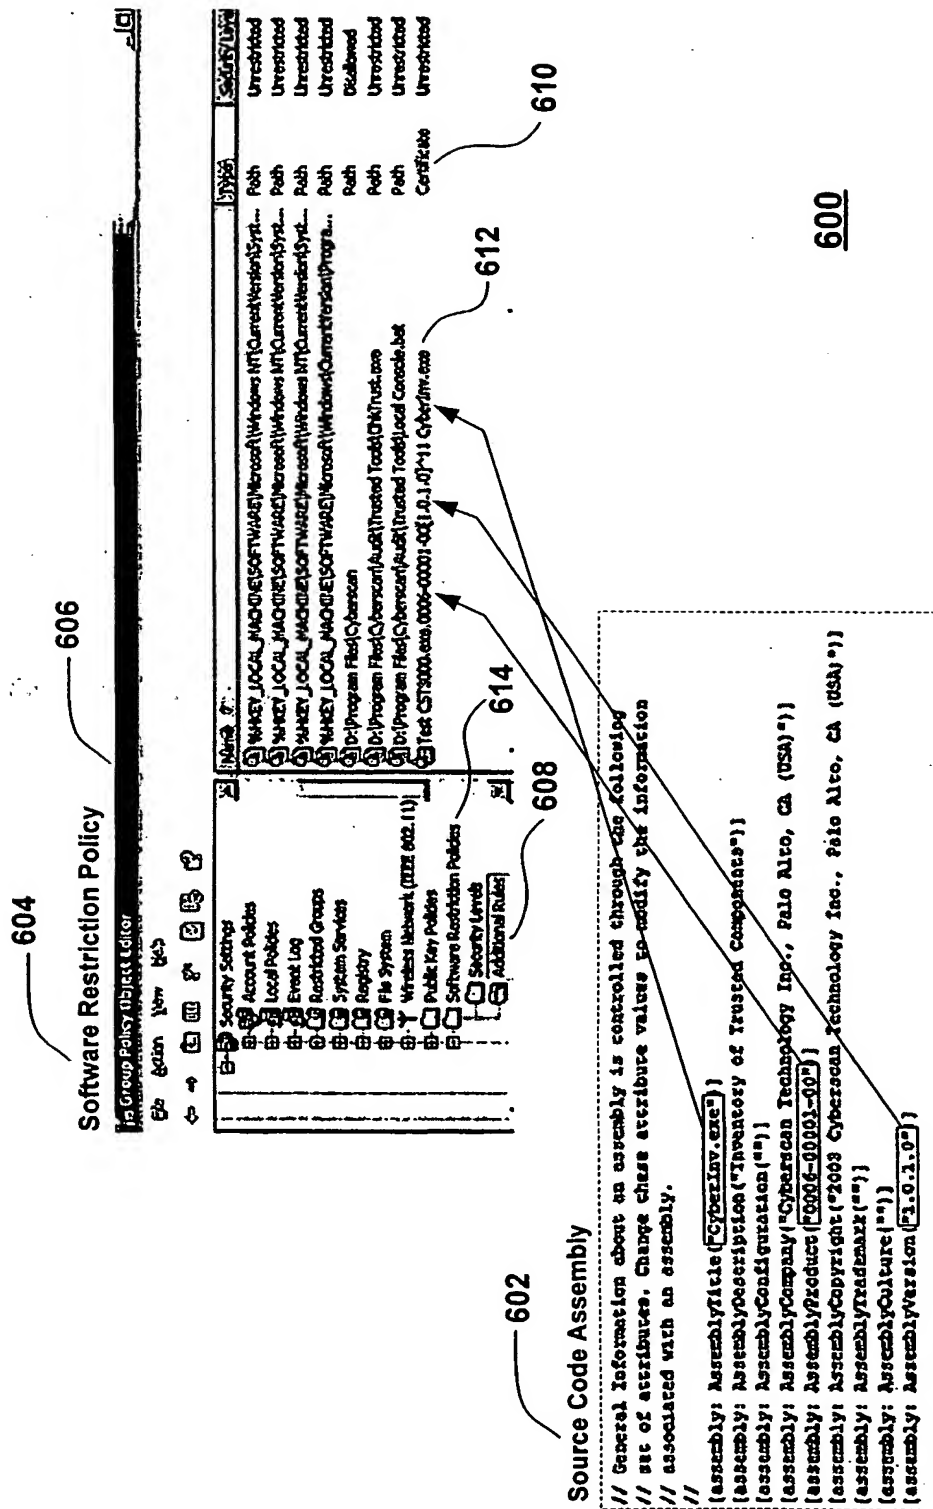


FIG. 6

THIS PAGE BLANK (USPTO)

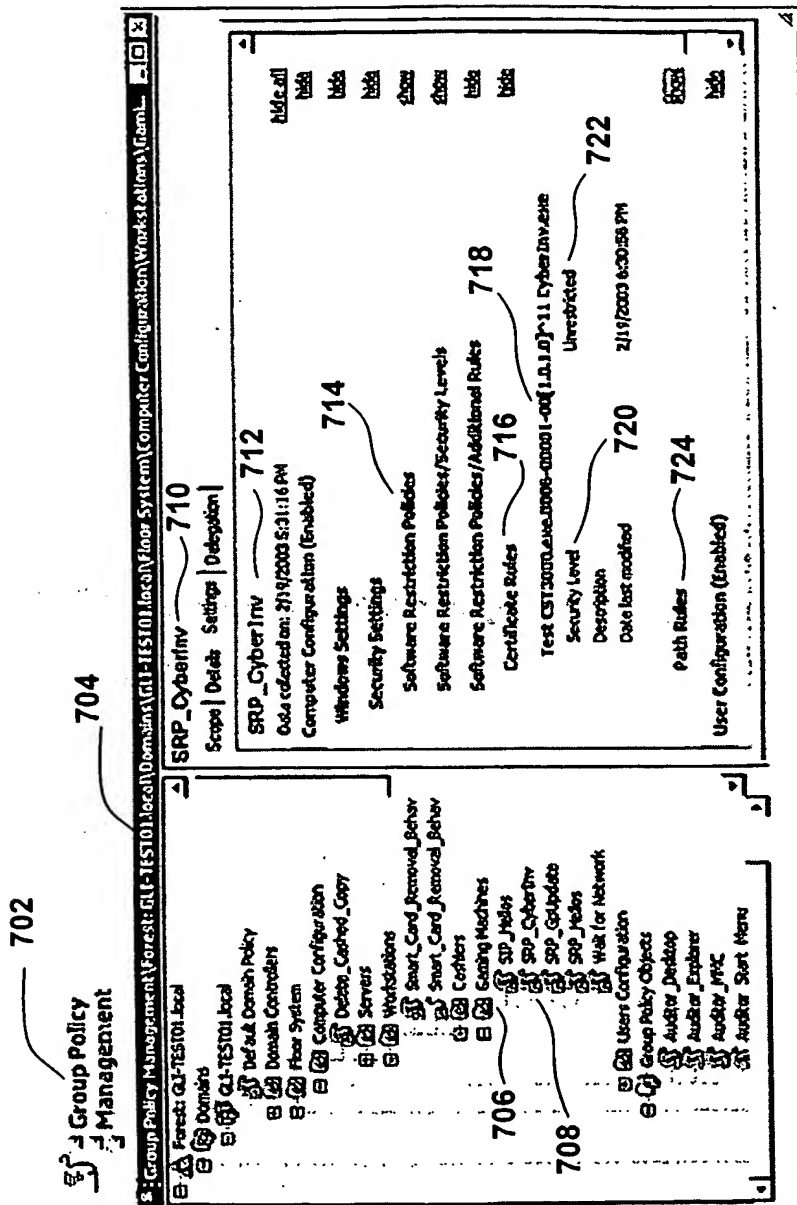

700

FIG. 7

THIS PAGE BLANK (USPTO)


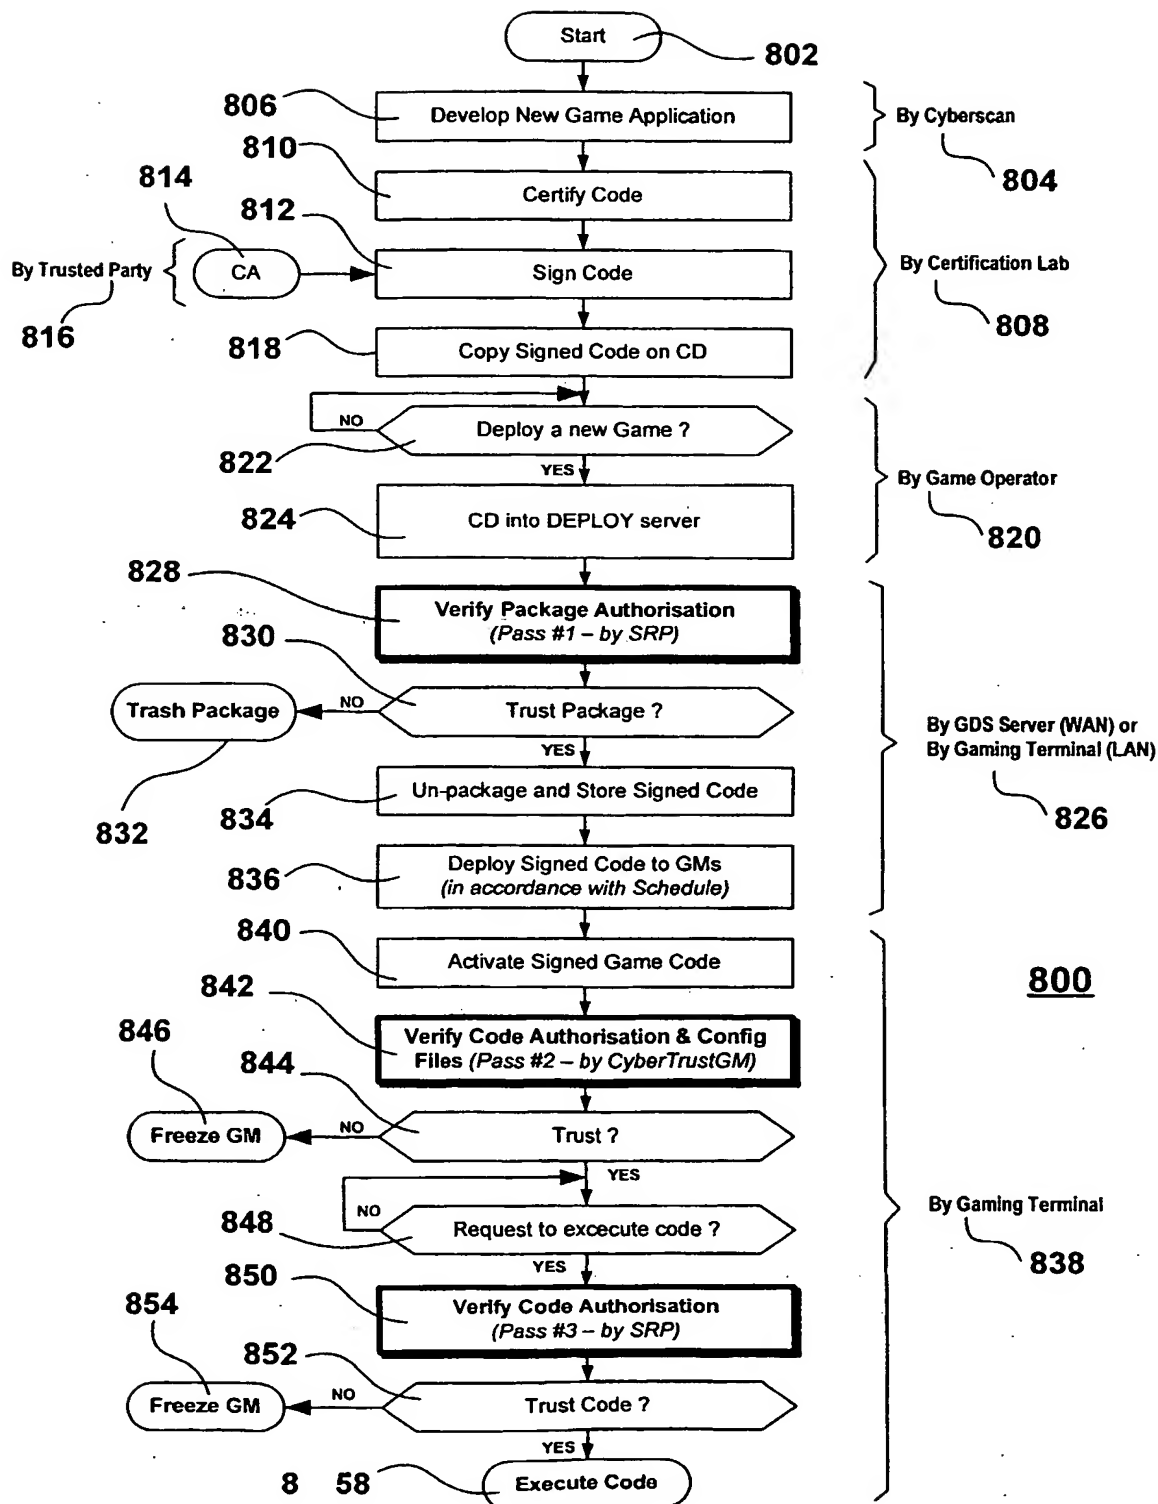


FIG. 8

THIS PAGE BLANK (USPTO)

FIG. 9

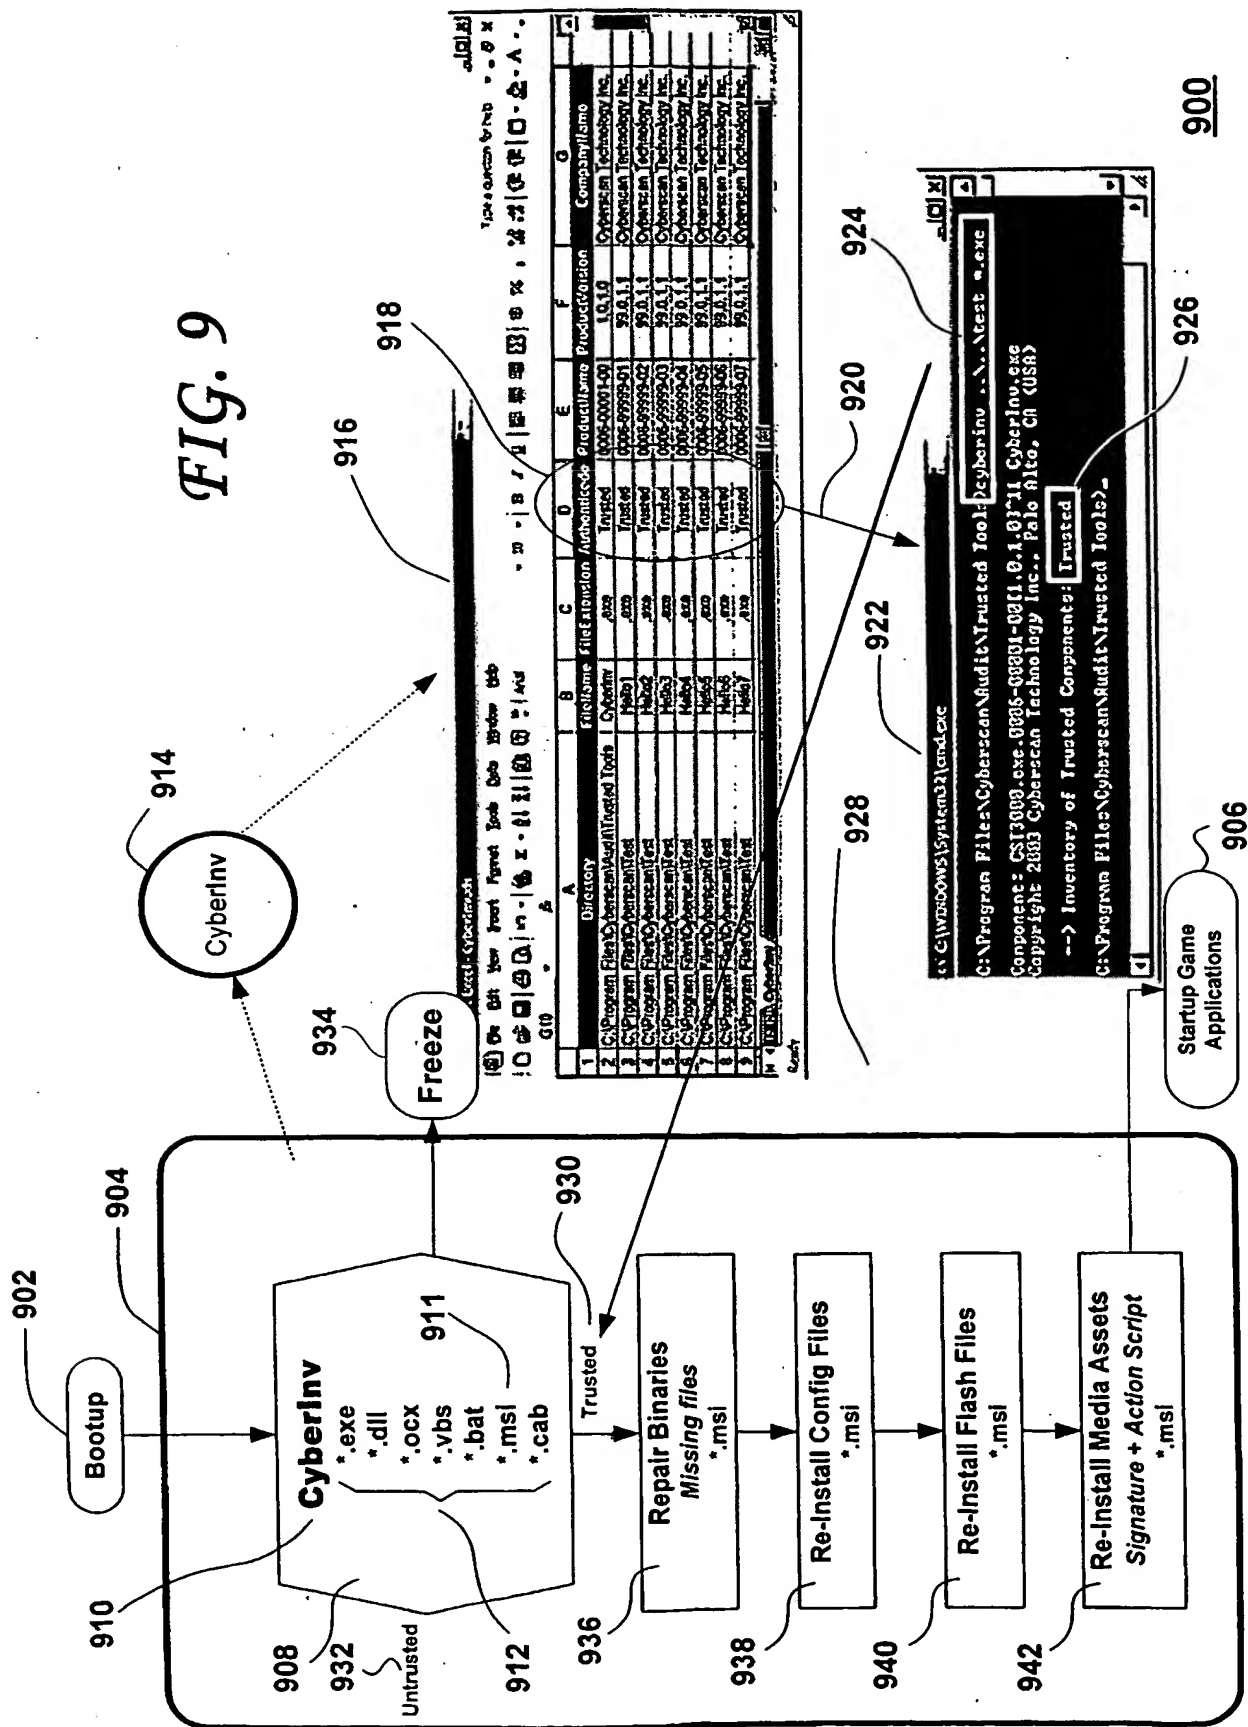

THIS PAGE BLANK (USPTO)



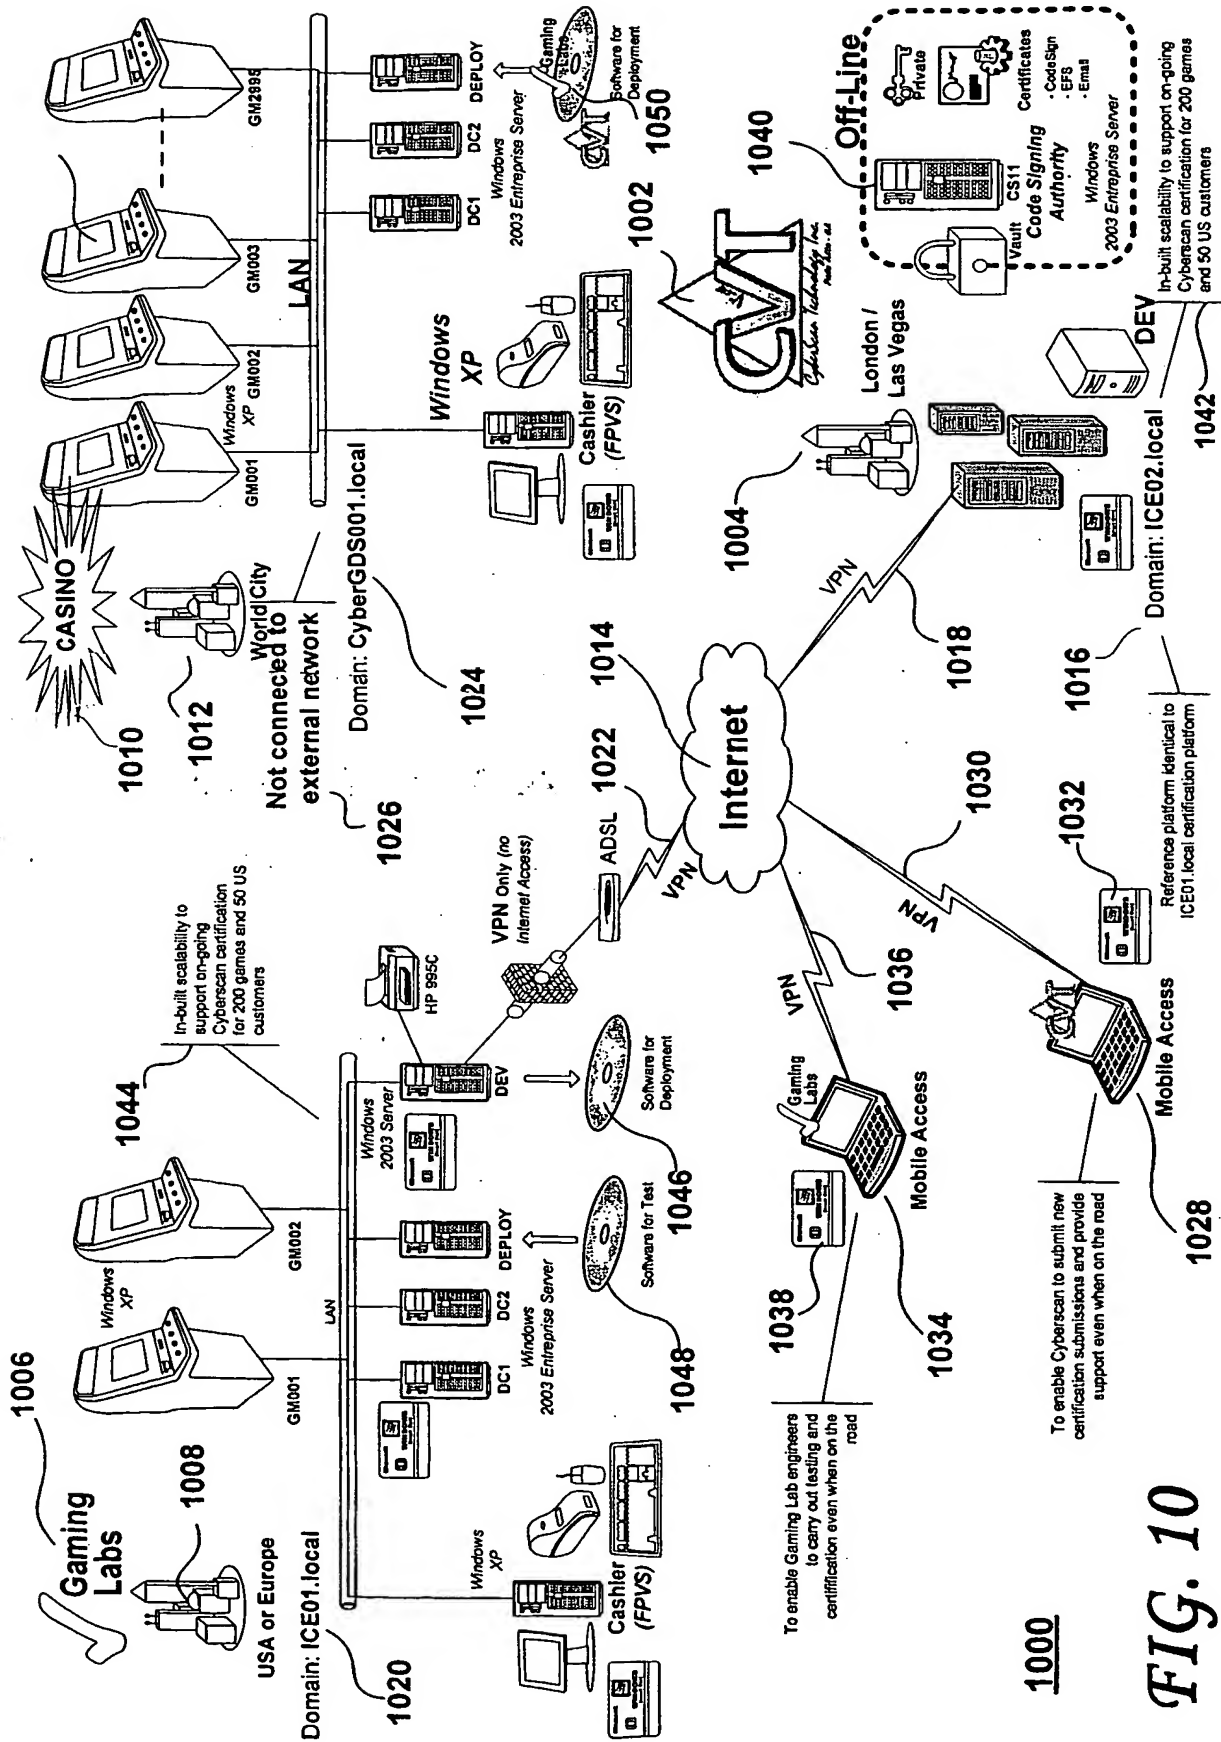


FIG. 10

THIS PAGE BLANK (USPTO)

**FIG. 11**

THIS PAGE BLANK (USPTO)

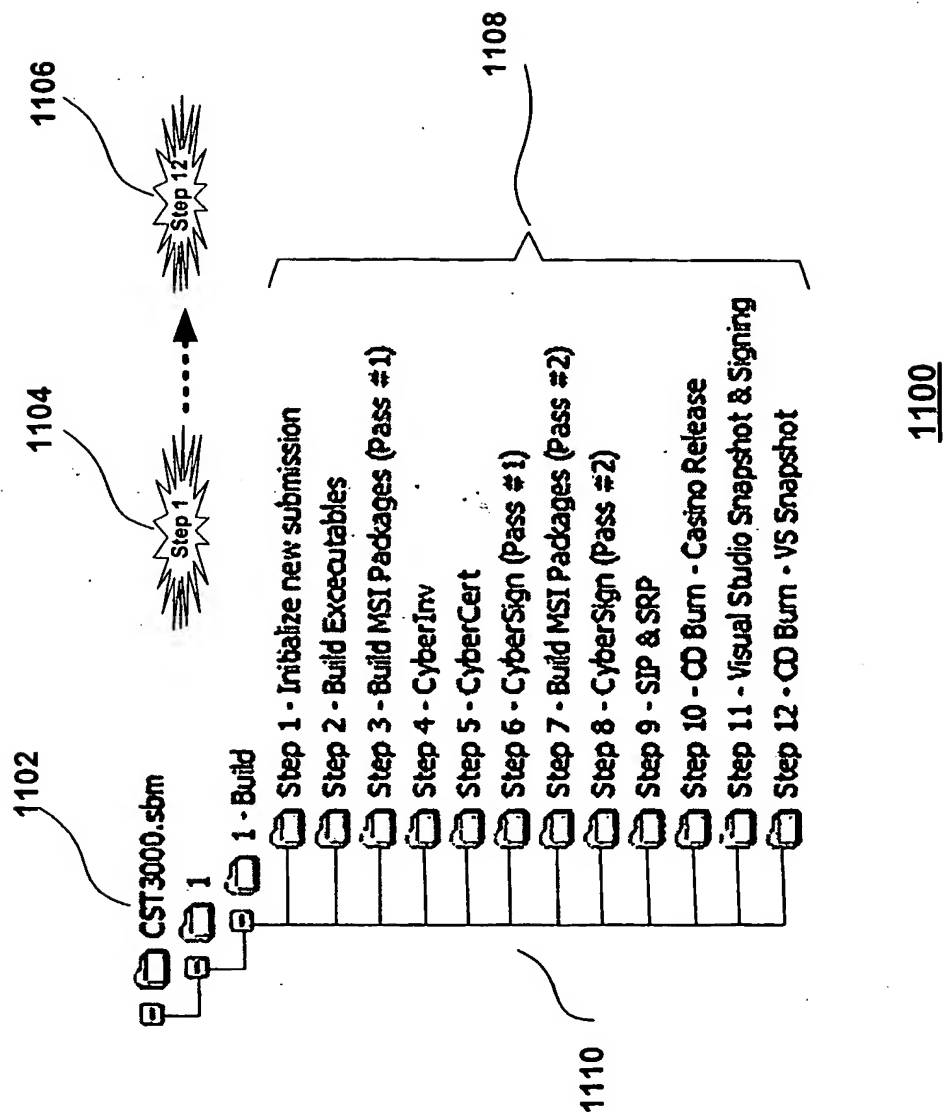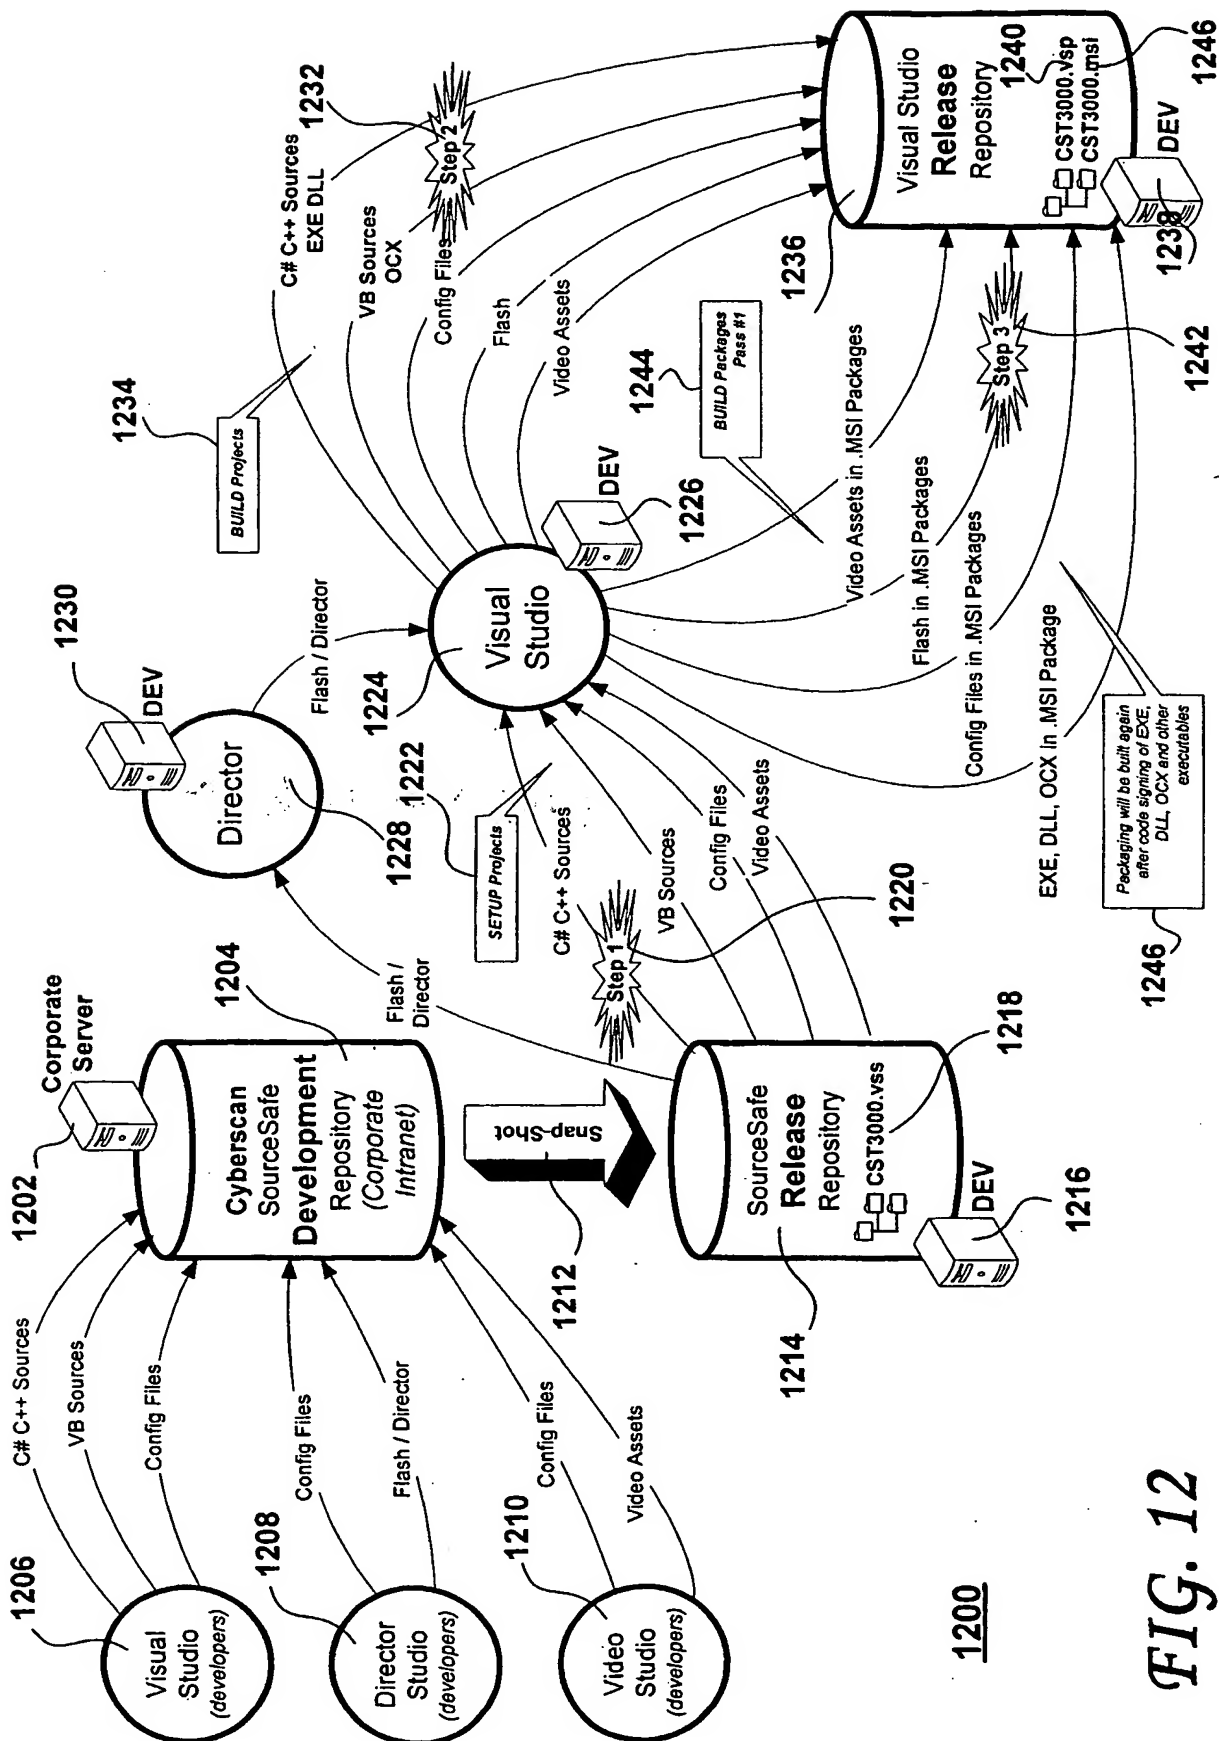

THIS PAGE BLANK (USPTO)

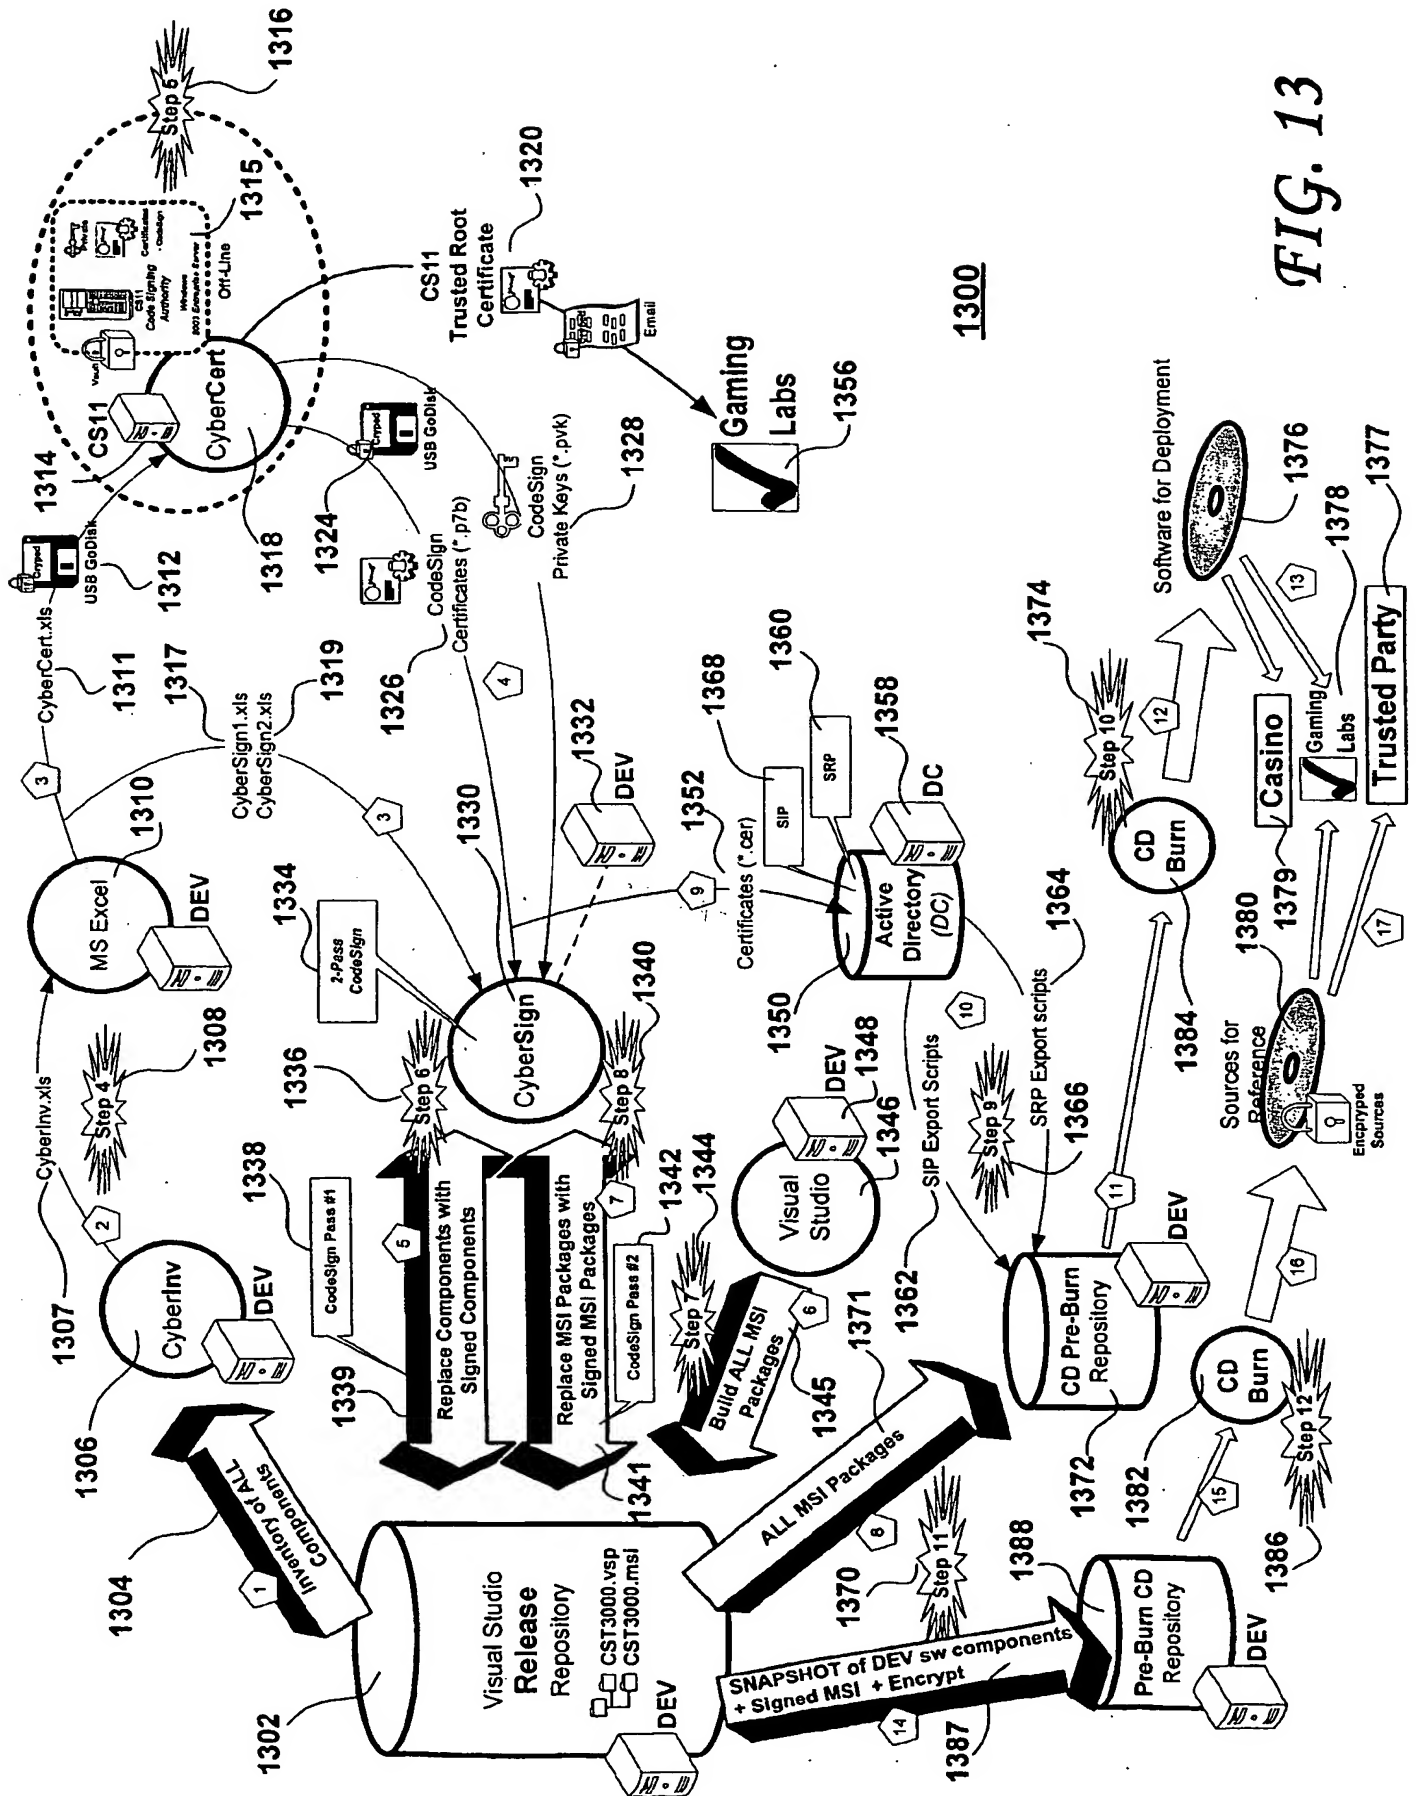


FIG. 13

THIS PAGE BLANK (USPTO)


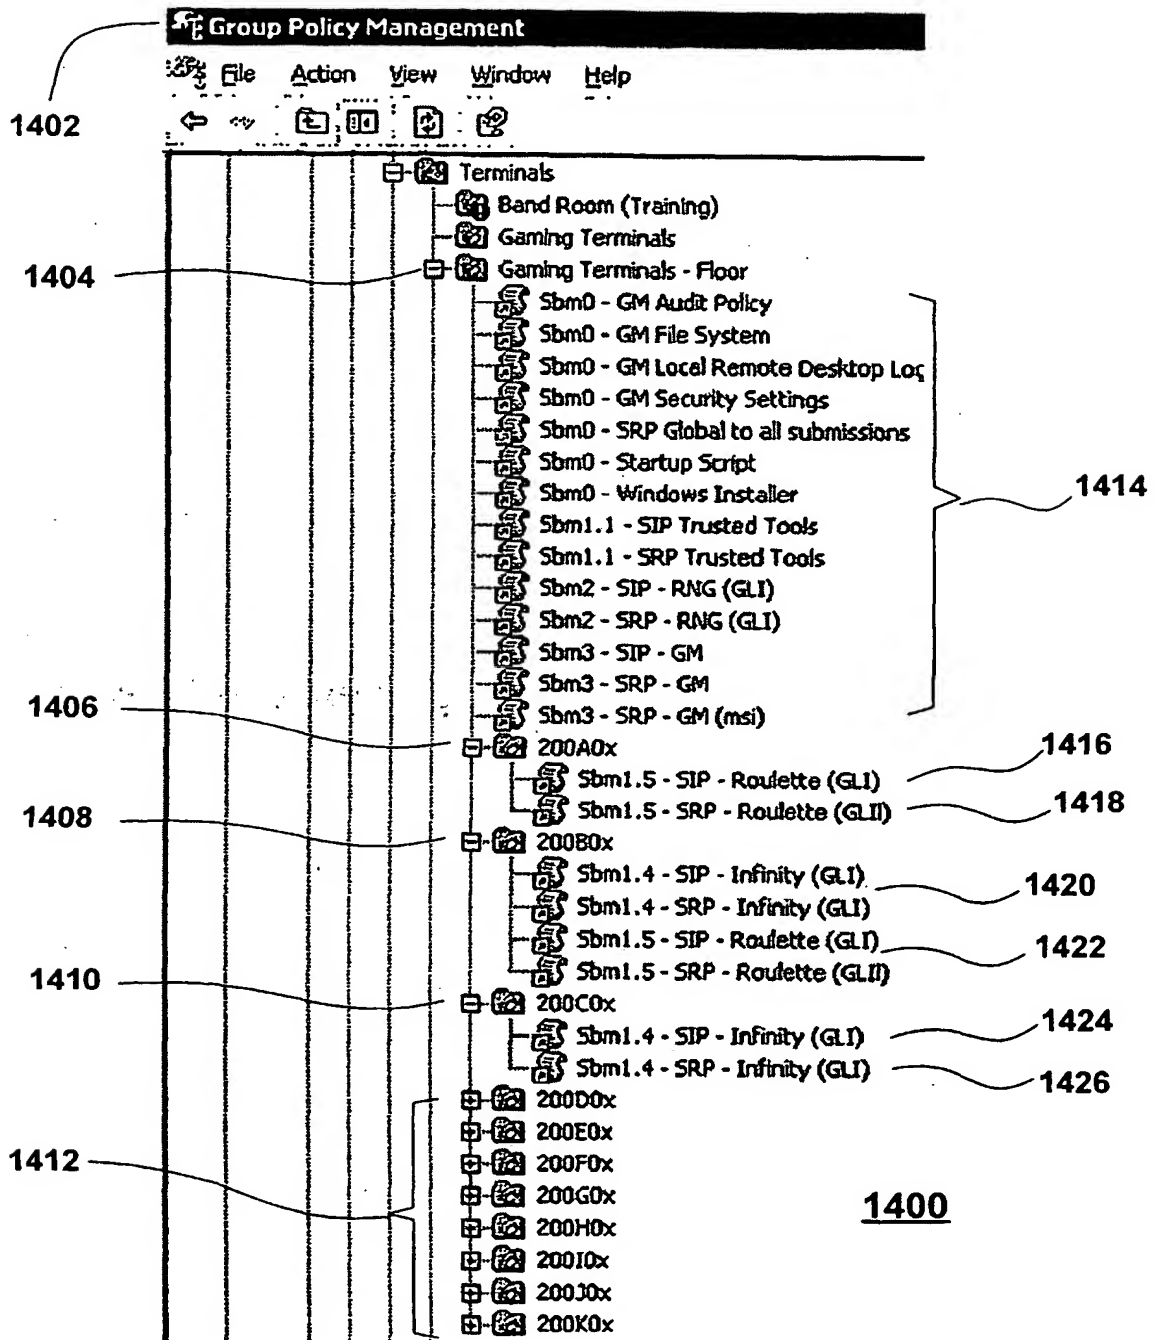


FIG. 14


THIS PAGE BLANK (USPTO)

THIS PAGE BLANK (USPTO)

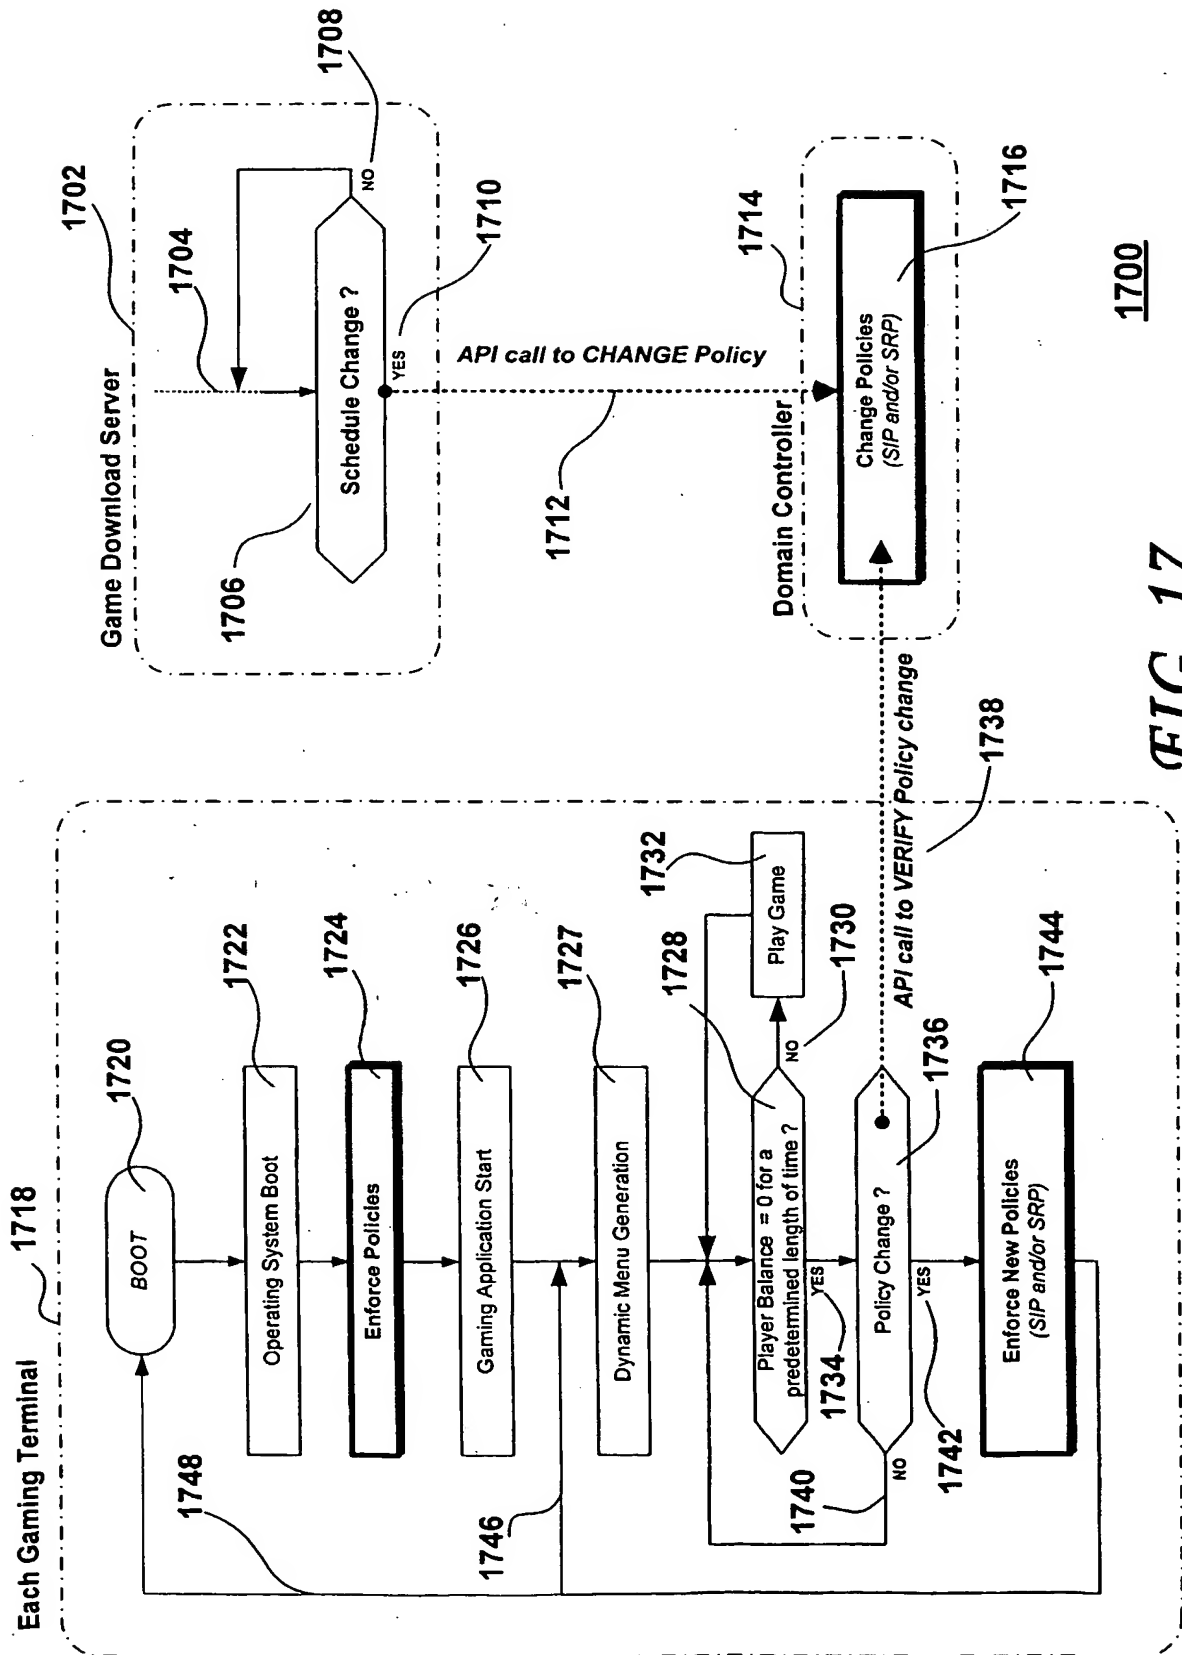

1700

THIS PAGE BLANK (USPTO)

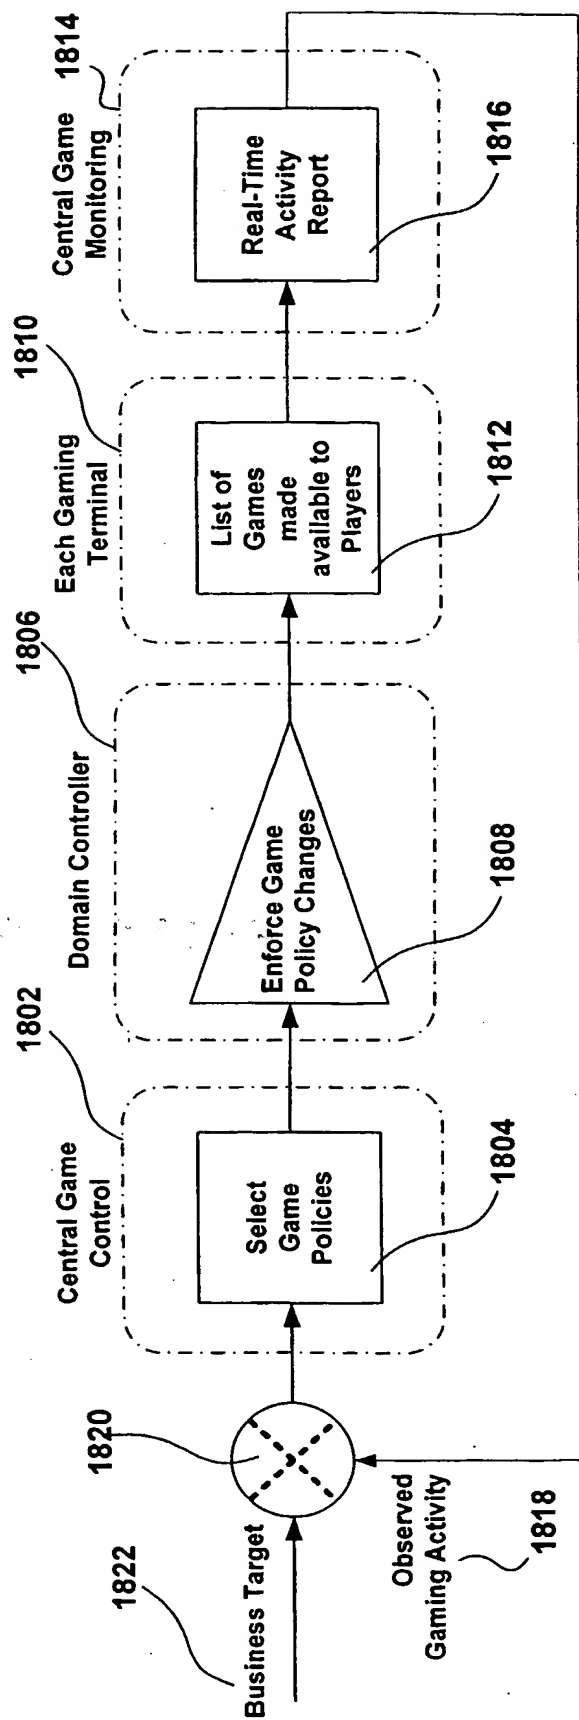

1800

FIG. 18

THIS PAGE BLANK (USPTO)

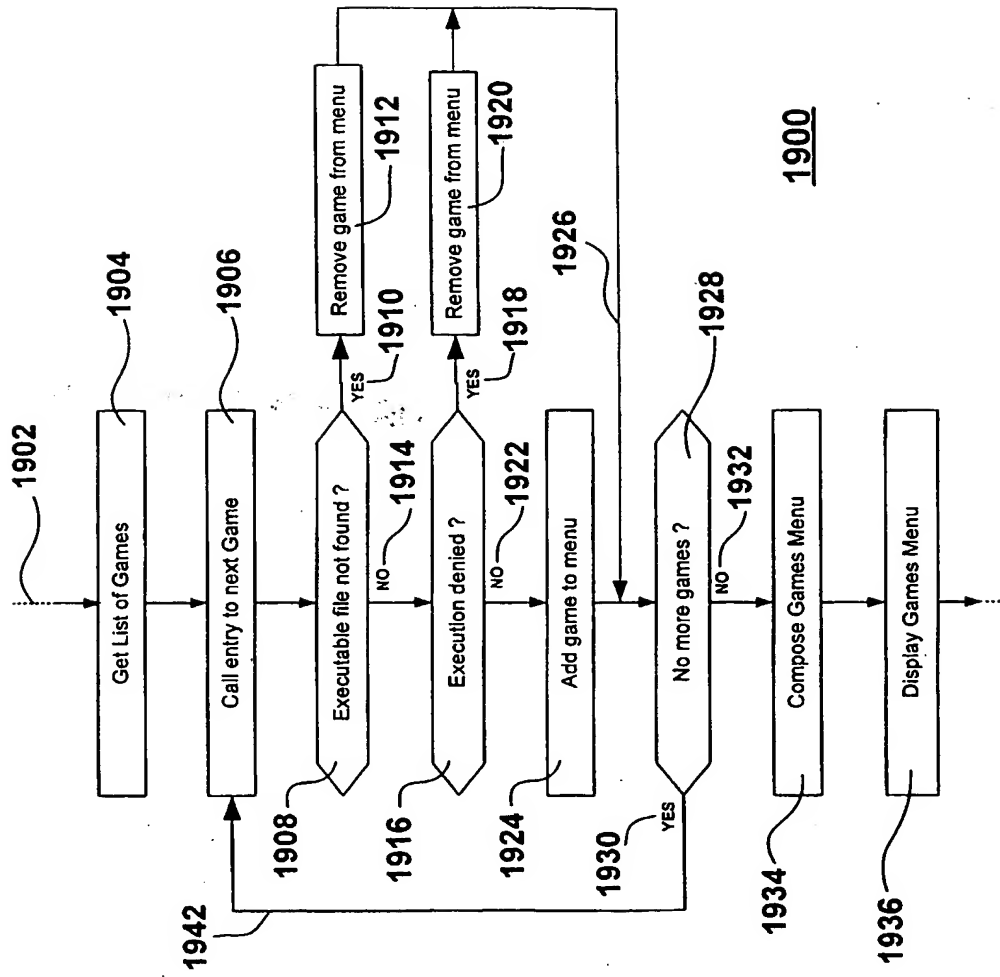


FIG. 19

THIS PAGE BLANK (USPTO)

Component File Name	Part Number	Version	Subject Name for Code-Sign PKI Certificate
Infinity.dll	0099-00001-00	1.0.101.0	GDS.exe.0099-00001-00[1.0.1.0] Infinity.dll
Infinity.Hello.dll	0099-00001-99	1.0.5.0	GDS.exe.0099-00001-00[1.0.1.0] Infinity.dll

2002 2004 2006 2008 2010 2012 2014 2016 2018 2020 2022 2024 2026 2028

2000

FIG. 20

THIS PAGE BLANK (USPTO)

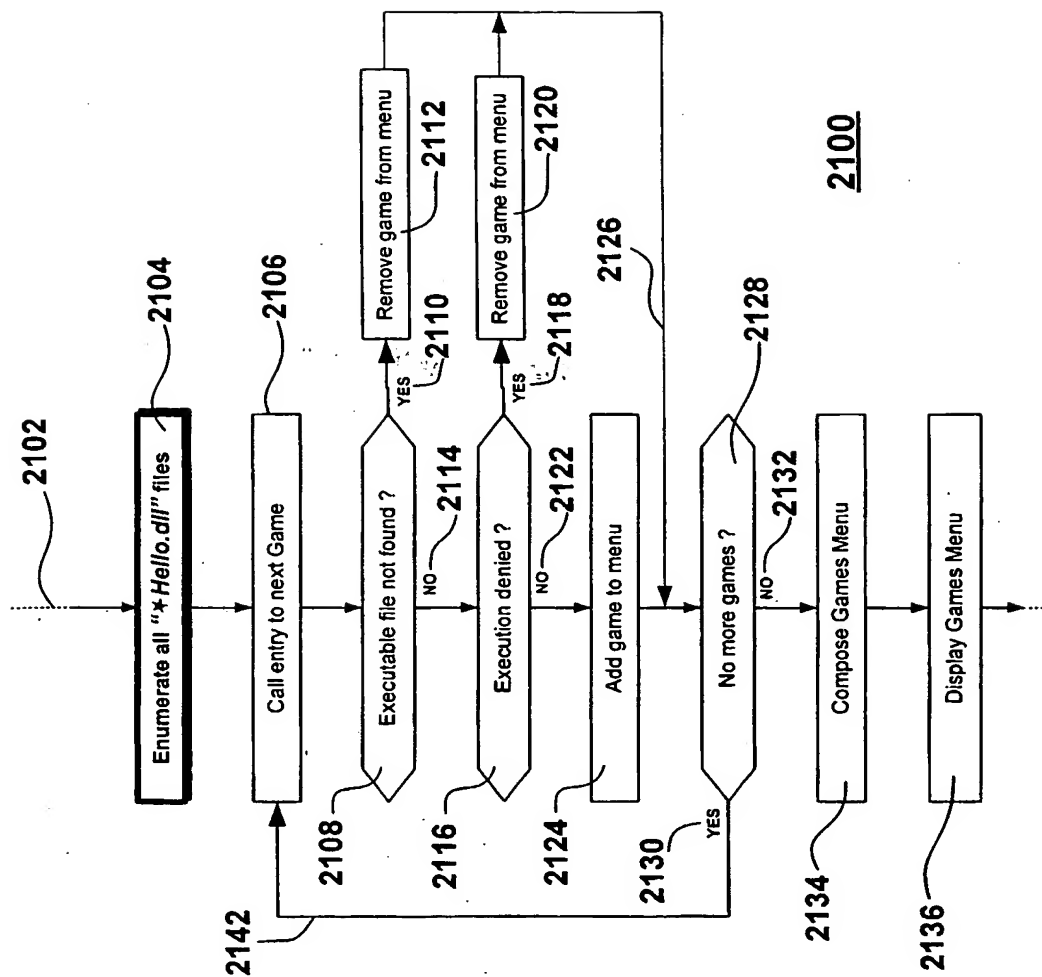


FIG. 21

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)